

HD 9/25 G CLASSIC

The HD 9/25 G is the most powerful cold water high-pressure cleaner with petrol engine in our Classic range. It stands out for its self-sufficient power supply and working pressure of up to 250 bar. This machine will not function if supplied with water from a tank, IBC or bowser, it must be supplied with mains pressure water.



Order no. 1.187-013.0

- Independent high-pressure cleaning irrespective of external power sources
- Robust crankshaft pump with ceramic pistons
- Compact, light and extremely mobile

Technical data

EAN code		4054278731834
Flow Rate	l/h	900
Operating pressure	bar / MPa	250 / 25
Max. Pressure	bar / MPa	300 / 30
Water inlet		3/4"
Drive type		Petrol
Motor type		G390FA
Number of users at one time		1
Mobility		High
Colour		anthracite
Weight (with accessories)	kg	56.8
Weight incl. packaging	kg	64.8
Dimensions (L × W × H)	mm	878 × 538 × 702

Scope of supply

Spray gun: Standard
High-pressure hose length: 10 m
Power nozzle
Water filter

Equipment

Cage frame
Crankshaft pump with ceramic pistons



Independence

- Allows independence of external power sources.
- Complies with the requirements of exhaust emissions standard EU STAGE V.
- Convenient manual pull start.



Outstanding mobility

- Puncture-proof wheels guarantee permanently high mobility.
- The compact and slim machine is also very easy to manoeuvre in confined areas.
- For good mobility, easy transport and space-saving storage – fits in a standard car.




Durable and sturdy

- A robust tubular steel frame reliably protects the machine against damage.
- Proven safety technology such as thermo and safety valve and water filter.
- Crankshaft pump with ceramic pistons.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0

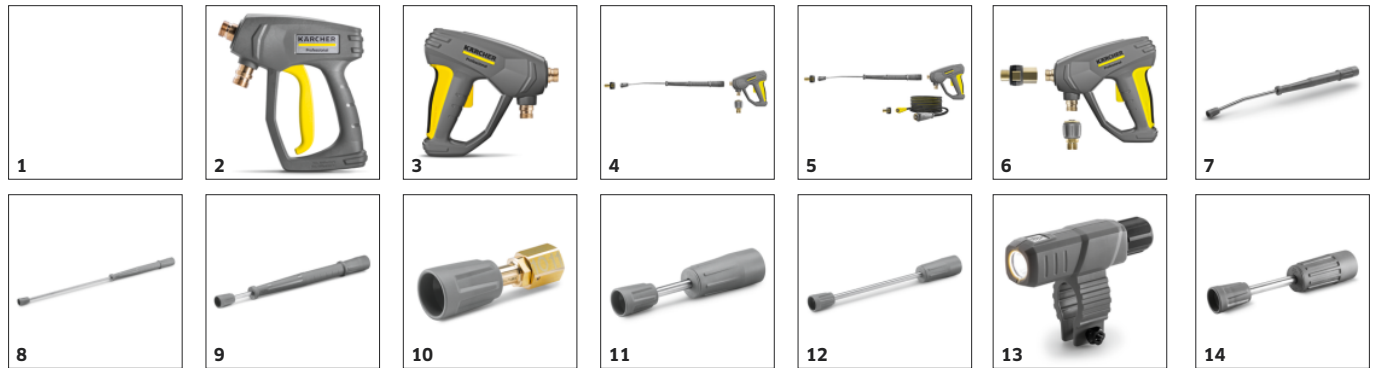


		Order no.	Description	
TRIGGER GUNS				
Trigger guns				
Pistol	1	9.751-376.0		■
Pistol TR 155°C with package	2	4.119-002.0	High-quality Classic spray gun with robust valve. Also suitable for Kärcher hot water high-pressure cleaners.	□
EASY!Force Advanced	3	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	□
EASY!Force conversion kit 1 - from high-pressure hose	4	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	□
EASY!Force conversion kit 2 - from machine	5	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	□
EASY!Force conversion kit 3 - high-pressure gun	6	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	□
SPRAY LANCES				
Rotating spray lances				
Spray lance, 840 mm, rotatable	7	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
Jet pipe TR 1050mm with package, 1050 mm	8	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	□
Jet pipe TR 600mm with package, 600 mm	9	4.119-009.0	Rotating Classic spray lance with ergonomic handle bowls in a robust and high-quality stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	□
Jet pipe Classic TR 100mm, 100 mm	10	4.119-013.0		□
Jet pipe Classic TR 200mm, 200 mm	11	4.119-014.0		□
Jet pipe Classic TR 400mm, 400 mm	12	4.119-015.0		□
LED nozzle light	13	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	□
Spray lance, 250 mm, rotatable	14	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0

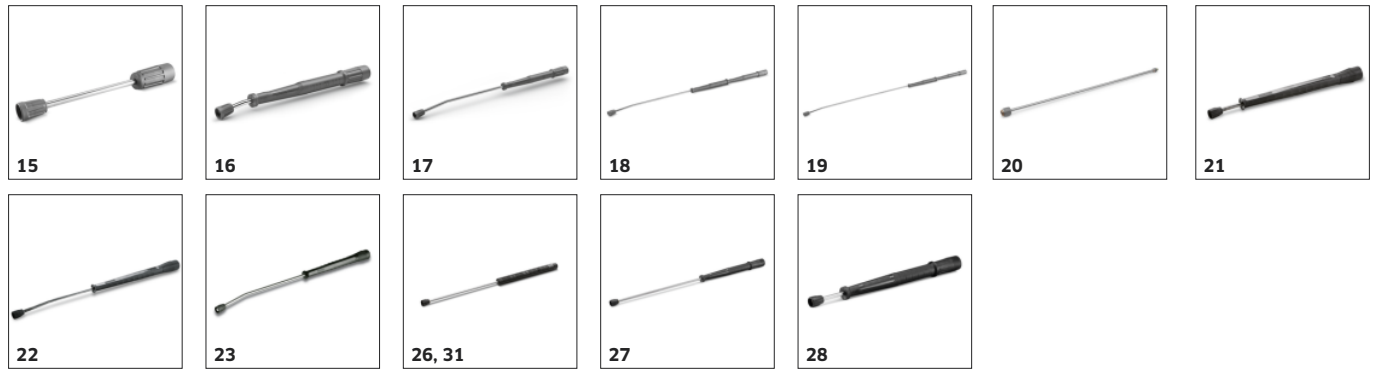

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 400 mm, rotatable	15	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	16	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	17	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	18	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	19	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance extender, 1000 mm	20	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	☐
Spray lance, 600 mm, rotatable	21	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	22	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	23	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	24	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	25	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance				
Spray lance 850 mm	26	9.751-146.0	Galvanised spray lance with manual screw fitting for high-pressure cleaners in the Classic range from Kärcher. Not rotatable. Length: 850 mm.	☒
Jet pipe TR 1050mm with package	27	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	28	4.760-856.0		☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
SPRAY LANCES				
Spray lance				
Jet pipe Classic M 200mm	29	4.760-887.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe Classic M 840mm	30	4.760-895.0	Optimal for use with medium and hard water: the PressurePro Machine Protector Advance 1 RM 110 for hot water high-pressure cleaners with system care adaptation offers comprehensive protection for the heating coil system at water temperatures of up to 150 °C. As such, RM 110 ensures a constant water flow, preventing reductions in performance, saving energy and significantly extending the lifetime. It also helps to reduce expensive decalcification measures for the heating coil and generally reduce the maintenance costs. In addition, the care agent is HACCP-compliant, making it suitable for use in food-processing companies, and very easy to use since the practical Advance bottle can be used directly on the machine.	☐
600 mm spray lance	31	9.751-140.0	600 mm long, zinc coated spray lance with hand screw connection. Not rotatable.	☐
250 mm lance, non-rotatable	32	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Double lance				
Double lance, 960 mm	33	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
Angular spray lance				
WC and gutter lance	34	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	☐
Spray lance for toilets and rain gutters	35	4.760-073.0		☐
Flexible spray lance				
Flexible lance, 1050 mm	36	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
High pressure articulated joint	37	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	☐
	38	4.481-039.0	High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	☐
Jet pipe flexible 0,85m, 850 mm	39	6.394-655.0	With the special PressurePro Machine Protector RM 110 for use in applications with medium to hard water, hot water high-pressure cleaners and their most important components as well as water-conducting parts are reliably protected against lime deposits. As a result, the water flow through the heating coil is ensured and the unit performance remains constant, while users can save energy and massively reduce maintenance costs for time-consuming decalcification measures at the same time. The PressurePro Machine Protector RM 110 is HACCP-compliant and therefore suitable for use in food-processing companies.	☐
Flexible lance, 1050 mm	40	6.394-654.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
Gutter cleaner				
Gutter cleaning lance	41	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	☐
Undercarriage spray lance				
Underbody lance	42	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
SPRAY LANCES				
Undercarriage spray lance				
Underbody lance	43	4.760-245.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
Additional handle				
Additional handle for EASY!Lock spray lances	44	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	☐
PowerControl spray lance				
PowerControl spray lance 038	45	4.112-047.0	Infinitely variable pressure adjustment during operation directly in the operator's gripping area, especially for machines without servo control function. The cleaning performance can be adapted to the respective task in an instant. The low pressure mode for the application of the cleaning agent and the adjustment of the jet level round off the product.	☐
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle 25°, 038	46	2.113-006.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	☒
Power nozzle 25°, 043	47	2.883-829.0		☒
Power nozzle spray angle 15°				
Power nozzle , 038	48	2.113-044.0	Flat jet nozzle for stubborn dirt.	☐
Power nozzle 15°, 040	49	2.883-388.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
Power nozzle spray angle 40°				
Power Nozzle 40°, 040	50	2.884-522.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	☐
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 10 m, ID 8, 315 bar, M22 × 1.5	51	9.751-420.0	Up to 155 °C heat-resistant high-pressure hose (DN 8) with 10 m length. Perfect for all high-pressure cleaners in the Classic range from Kärcher.	☒
High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock	52	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 10 m, ID 6, 250 bar, 2 × EASY!Lock	53	6.110-034.0	10 m long high-pressure hose with EASY!Lock manual screw fitting on both sides. Nominal size DN 6, suitable up to 250 bar.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × M22 × 1.5	54	6.391-342.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose, 10 m, ID 6, 250 bar, 2 × EASY!Lock	55	6.110-035.0	10 m long high-pressure hose (DN 6) equipped with EASY!Lock manual screw fitting on both sides. Suitable up to 250 bar and with ANTI!Twist.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × M22 × 1.5	56	6.390-010.0	With screw connections on both sides, M 22 × 1.5 with bend protection.	☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



57



58, 65



55, 59, 61-63



60, 74, 80-81



52, 64



66-67, 69



68



70

		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 10 m, ID 6, 300 bar, 2 × EASY!Lock	57	6.110-056.0	High-pressure hose (DN 6) equipped with ANTI!Twist and the new EASY!Lock manual screw fitting on both sides. For pressures up to 300 bar. 10 m long.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × M22 × 1.5	58	6.390-031.0	Screw connections at both ends, M 22 × 1.5, with kink protection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	59	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 30 m, ID 8, 315 bar, 2 × M22 × 1.5	60	6.390-293.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	61	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	62	6.110-032.0	20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.	☐
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	63	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 × EASY!Lock	64	6.110-042.0	Equipped with innovative EASY!Lock manual screw fitting and suitable for pressures up to 220 bar: 15 m long high-pressure hose (DN 10).	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock	65	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	66	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	67	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	68	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	69	6.110-060.0	With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	70	6.110-024.0	1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	71	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	72	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5).	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	73	6.110-038.0	Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure.	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	74	6.388-083.0	10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 × 1.5, with kink protection.	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	75	6.110-023.0	Robust high-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, for up to 400 bar pressure.	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	76	6.391-354.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	77	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × M22 × 1.5	78	6.389-709.0	With rotary coupling, 2 × M 22 × 1.5	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	79	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	80	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × M22 × 1.5	81	6.390-294.0	With rotary coupling, 2 × M 22 × 1.5	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	82	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	83	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
Longlife food industry version with unions on both sides				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	84	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife food industry version with unions on both sides				
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	85	6.110-054.0	Durable high-pressure hose with double steel reinforcement and blue, non-marking and animal fat resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Classic				
High-pressure hose Classic, 10 m, ID 8, 315 bar × , EASY!Lock	86	4.119-005.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , EASY!Lock	87	4.119-006.0		☐
Hose TR DN8 31,5MPa 30m with package, 30 m, ID 8, 315 bar × , EASY!Lock	88	4.119-007.0		☐
Hose TR DN6 25MPa 10m with package, 10 m, ID 6, 250 bar × , EASY!Lock	89	4.119-012.0		☐
Hose assembly with package TR DN6 25MPa, 15 m, ID 6, 250 bar × , EASY!Lock	90	4.119-016.0		☐
Hose assembly with package TR DN10 25MPa, 20 m, ID 10, 250 bar × , EASY!Lock	91	4.119-019.0		☐
Hose assembly with package TR DN10 25MPa, 40 m, ID 10, 250 bar × , EASY!Lock	92	4.119-020.0		☐
Hose with transport packaging, 10 m, ID 8, 315 bar × , M22 × 1.5	93	4.760-834.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose M DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , M22 × 1.5	94	4.760-857.0		☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt Blaster, small				
Dirt blaster, small, 040	95	4.114-020.0	With rotating point jet for more efficient removal: the new performance dirt blaster with nozzle size 040 achieves up to 50% higher cleaning and area performance than its predecessor.	☐
Dirt blaster, large				
Dirt blaster, large, 040	96	4.114-041.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 040	97	4.763-252.0		☐
Classic rotary nozzle				
Rotor nozzle TR 040	98	4.119-023.0	The powerful rotating point jet of the Classic rotary nozzle from Kärcher ensures the best possible cleaning results and is suitable for water temperatures of up to 60 °C.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
MULTIPLE-JET NOZZLES				
Triple nozzles				
Triple nozzle, 038	99	4.117-032.0	Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application.	☐
Angle vario nozzle 0°-90°				
Angled Vario nozzle, 050	100	4.113-007.0	Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces.	☐
ECO!BOOSTER				
eco!Booster TR 040	101	2.113-086.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 040).	☐
Eco!Booster MAX TR 040	102	2.113-095.0	Maximum efficiency and versatility in professional cleaning. The eco!Booster MAX offers more than double the area performance and ergonomic handling.	☐
Eco!Booster MAX TR 045	103	2.113-096.0		☐
QUICK CONNECT				
Quick-fitting pipe union coupler trapezo	104	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Quick-fitting pipe union plug nipple tra	105	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
Quick coupling	106	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Plug nipple	107	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	☐
DRUM AND TANK CLEANING				
Add-on kit mud sucker	108	2.641-798.0	For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	☐
OTHER HP ACCESSORIES				
Jet gun	109	2.869-067.0	Short set-up time, easy transport, instant switch off – the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	☐
SEALS FOR TRAPEZOIDAL THREAD				
Spare part set seals TR	110	2.880-001.0		☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	111	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 14MPa	112	6.110-108.0	10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



112-114, 123-125



115-116, 118, 120



117, 119, 121



122, 219-221



126

		Order no.	Description	
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 14MPa	113	6.110-109.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
	114	6.110-110.0	30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
High pressure hose pipe cleaning DN6 14M	115	6.392-632.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
	116	6.392-633.0	30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Hose assembly TR pipe cleaning DN6 max.2	117	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose	118	6.390-028.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	119	6.110-008.0		☐
Pipe cleaning hose, DN 6, 30 m	120	6.390-029.0	30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Hose assembly TR pipe cleaning DN6 max.2	121	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	122	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Hose assembly TR pipe cleaning DN6 14MPa	123	6.110-048.0	10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose	124	6.110-049.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 30 m	125	6.110-050.0	30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning nozzle				
Dirt blaster pipe cleaning D21/040	126	4.765-001.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
PIPE CLEANING				
Pipe cleaning nozzle				
Dirt blaster pipe cleaning D30/040	127	4.765-004.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Pipe cleaning nozzle	128	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	☐
	129	5.763-016.0		☐
	130	5.763-017.0		☐
Rotating pipe cleaning nozzle	131	6.415-428.0	Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.	☐
FLOOR AND HARD SURFACE CLEANER				
Hard surface cleaner FR Classic				
FR TR 40 Classic	132	4.119-029.0	The robust classic surface cleaner with 400 mm diameter and nozzle kit supplied (2 × size 020; others can be ordered separately).	☐
FR TR 30 Classic	133	4.119-030.0	Coarse spray agent made from aluminium slag designed for use with Kärcher blasting systems and guns. The single-use mineral spray agent is not water-soluble and has a granulation of 0.25 to 1.4 mm. It boasts an impressive performance when blasting clean aerated and exposed aggregated concrete, Porphyry, granite, steel and clinker. In addition, the material is well suited to removing paint, varnishes and rust and to matting, rough blasting and sand blasting thanks to its edged shape, high level of hardness (6-7 Mohs) and very abrasive effect.	☐
Surface cleaner medium M with package	134	4.760-876.0	For hot water applications up to 100 °C: the robust classic surface cleaner made of metal with HP trigger gun, 500 mm diameter and nozzle kit (2 × nozzle size 025; others can be ordered separately).	☐
Hard Surface Cleaner FRV 30				
FRV 30	135	2.111-010.0	With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C.	☐
	136	2.642-999.0	With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. There is no longer a need to rinse the surface after cleaning, as the dirty water can be removed through the 5m suction hose, which is supplied. Additional features include the non-marking steering rollers and double ceramic bearings. Machine specific nozzle kit must be ordered separately.	☐
Add-on kit rubber lip	137	2.642-910.0	For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	☐
Extension hose 5 m	138	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	☐
Add-on kit hose attachment	139	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	☐
Add-on kit dirt trap	140	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	141	2.111-011.0	Up to 10 times greater area coverage compared with the conventional high pressure jet.	☐
Hard surface cleaner FR 30 ME				
FR 30 ME surface cleaner	142	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
	143	2.640-355.0		☐
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	144	2.640-679.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 650 l/h - 850 l/h	145	2.639-187.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 040	146	2.642-431.0	Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30.	☐
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	147	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	☐
FRV 30 ME	148	2.642-911.0		☐
Extension hose FRV 30 Me and FRV 50 Me	149	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 2, 700 l/h - 800 l/h	150	4.112-064.0	Developed for Kärcher high-pressure cleaners without servo control: The cup foam lance Advanced 2 impresses with a main body made of Ecobrass for use with aggressive cleaning agents.	☐
Cup foam lance DUO Advanced 2, 700 l/h - 800 l/h	151	4.112-068.0	For pressure washers without Servo Control: The DUO Advanced 2 cup foam lance is impressive with its option for direct switching to high-pressure cleaning and two-litre detergent tank.	☐
Cup foam lance Basic 2, 700 l/h - 800 l/h	152	4.112-054.0	Newly developed, very robust Basic 2 cup foam lance especially for high-pressure cleaners with a flow rate of 700-800 l/h. For excellent foam quality with half the cleaning agent consumption.	☐
Cup foam lance Advanced	153	6.394-969.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
Inno Foam Set				
Inno foam kit with detergent injector	154	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
FOAM SYSTEMS				
Inno Foam Set				
Inno foam kit with detergent injector	155	2.640-151.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Easy Foam Set				
Easy Foam Set with RM injector	156	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
	157	2.640-691.0		☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 060 for Inno/Easy Set 600 – 700 l/h	158	2.640-687.0	Optimal adaptation to different machine outputs for economic use.	☐
Nozzle kit 090 Inno/Easy kit 700 – 1000 l/h	159	2.640-688.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
Foam nozzle mounting kit				
Foam nozzle kit	160	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	☐
MIXERS AND INJECTORS				
HP detergent injector				
Detergent injector for high and low pressure (without nozzles)	161	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
Detergent injector for high pressure	162	4.637-033.0	Cleaning agent dosage at high pressure 3 – 5 %	☐
	163	3.637-170.0		☐
Detergent injector for high and low pressure (without nozzles)	164	3.637-001.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
Machine-specific nozzle kit with order no. 3.637-170				
Nozzle insert trapezoidal thread HD-GER.	165	4.769-005.0	For HD 500 – 700 l/h. Consists of nozzle insert + HP power nozzle + union	☐
Nozzle insert trapezoidal thread HDS-GER	166	4.769-011.0	For HD/HDS 750 – 1000 l/h. Consists of nozzle insert + HP power nozzle + union	☐
Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h	167	4.769-047.0		☐
Nozzle insert with order no. 3.637-001				
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	168	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
MIXERS AND INJECTORS				
Nozzle insert with order no. 3.637-001				
Low pressure for units rated up to 1100 l/h	169	4.769-001.0	For low pressure with machines up to 1.100 l/h	☐
Low pressure for units rated 1100 l/h or more	170	4.769-006.0	For low pressure with machines above 1.100 l/h	☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	171	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
	172	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	☐
Coupling				
Coupler -2xM22x1,5	173	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	☐
Connector				
Nozzle connector/screw connector	174	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐
Short spray unit	175	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Nozzle connector/screw connector	176	4.402-022.0	Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 × 1.5 and 1x M 18 × 1.5.	☐
Adapter				
Adapter M22 - Swivel	177	4.424-004.0	In order to install high-pressure hose with male coupling on thread with M22 × 1.5 Alternative:4.111-032.0 Adapter 4 - Device new / Hose old Swivel	☐
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	178	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	179	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	180	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter M22 - Swivel	181	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	182	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
COUPLING PARTS				
Adapter EASY!Lock				
Adapter 6 TR22IG-M22AG	183	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	184	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	185	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Coupler -2xTR22 - EASY!Lock	186	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
ADAPTER for replacement TR22IG-M22AG Er	187	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Hose reel add-on kit				
Add-on kit hose reel Classic HD-M	188	2.639-364.0		☐
Hose reel attachment kit for HD middle class, 15 m	189	2.110-024.0	Hose reel attachment kit for high-pressure middle class	☐
Automatic, self-winding hose reels				
Automatic plastic hose reel incl. high-pressure hose, 15 m	190	2.639-257.0	Spring-mounted and ready-to-use automatic hose reel for wall mounting. Simplifies handling of the high-pressure hose, shortens set-up times and increases occupational safety.	☐
Automatic hose reel, powder-coated steel / plastic, 20 m	191	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	192	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	193	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	194	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	☐
Automatic hose reel, stainless steel, includes swivel holder, 20 m	195	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	196	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0




		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels				
Powder-coated swivel holder	197	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	☐
Stainless steel swivel holder	198	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	☐
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Drive for roller brush 500	199	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	☐
Splash guard for roller brush 500	200	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	☐
Roller brush 500 soft	201	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	☐
Roller brush 500 medium	202	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	☐
Roller brush 500 hard	203	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	☐
Brush hard	204	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	☐
Brush medium	205	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	☐
Brush soft	206	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	☐
iSolar 800 Advanced	207	6.368-094.0	iSolar 800 water-driven brush head, 800 mm wide, for water flow rates of 700-1,000 l/h. With two contra-rotating disc brushes and flexible angle joint. For photovoltaic systems.	☐
iSolar 400 Advanced	208	6.368-092.0	iSolar 400 brush for water flow rate of 700-1,000 l/h. The water-driven disc brush with a width of 400 mm cleans small to medium-sized photovoltaic systems. Also perfect for use on elevated systems.	☐
Telescopic				
TL low pressure adapter	209	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	☐
Telescopic lance TL 7 F	210	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0

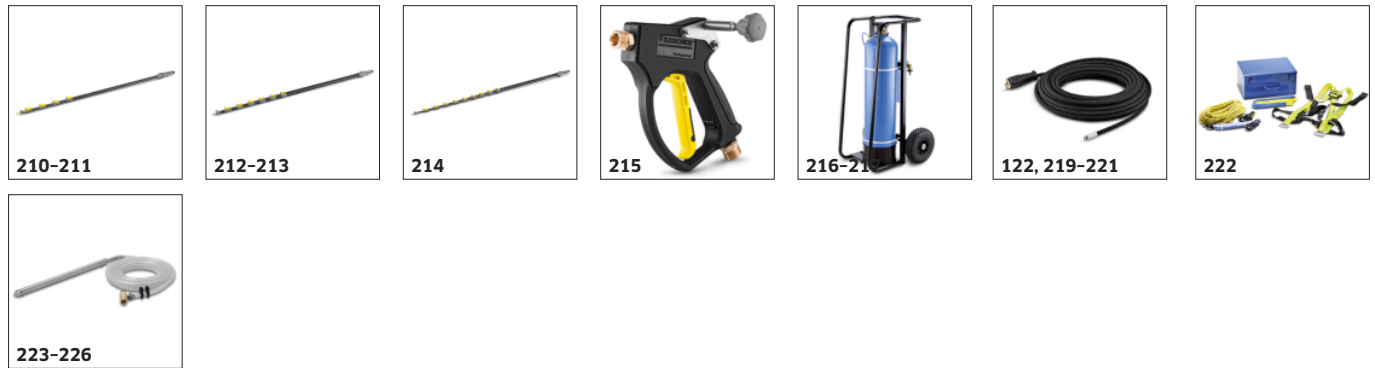

		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Telescopic				
Telescopic lance TL 7 H	211	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	☐
Telescopic lance TL 10 H	212	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	☐
Telescopic lance TL 10 C	213	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	☐
Telescopic lance TL 14 C	214	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	☐
TL high pressure adapter	215	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	☐
Wasserenthärtung				
WS 50	216	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water.	☐
WS 100	217	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water.	☐
WS Regenerator	218	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening units WS 50 and WS 100 can be backflushed and regenerated at the push of a button.	☐
Hoses				
Hose solar	219	6.392-978.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	☐
	220	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	☐
	221	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	☐
Attachment kits and adapters				
Case sheet steel	222	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case.	☐
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	223	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	☐
Wet blasting attachment without flow control (nozzles not included)	224	4.115-006.0	Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	225	4.762-010.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	☐
Wet blasting attachment without flow control (nozzles not included)	226	4.762-022.0	Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation	☐
Nozzle pack for wet blasting attachment				
Nozzle pack TR wet jet set 0040	227	2.112-019.0	Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0 4.115-006.0.	☐
Nozzle kit for wet blasting attachment 040	228	2.637-900.0	Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	☐
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 l/h	229	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	☐
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 1/2"	230	6.388-461.0	with hose liner	☐
With hose nozzle, R 3/4"	231	6.388-455.0		☐
With hose nozzle, R 1"	232	6.388-465.0	with hose barb	☐
With female thread, R 3/4"	233	6.388-473.0	with female thread	☐
Suction filter				
Water filter	234	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	☐
Suction filter with check valve	235	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	☐
Fine-mesh water filter				
Add-on kit water filter universal	236	2.637-020.0	Water fine filter, mesh size 25 µm, max. temperature 50 °C. Protects the machine from small dirt particles in the water. Water volume up to 1200 l/h. 3/4" connection, with 1" adapter.	☐
Fine-mesh water filter, 100 µm, R 3/4"	237	2.637-691.0	Fine-mesh water filter, 100 µm, max. temperature 60°C. Protects the high-pressure cleaner from dirt particles contained in the water. Transparent filter cup. Water flow rate up to 1200 l/h. Connector 3/4".	☐
Fine-mesh water filter with adapter	238	4.730-102.0	Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	☐

☐ Available accessories.

EQUIPMENT FOR HD 9/25 G CLASSIC

1.187-013.0



		Order no.	Description	
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18 × 1.5	239	4.113-001.0	For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection	☐
	240	4.762-016.0	For general-purpose cleaning of all surfaces. Clamps directly onto the spray lance. Connection M 18 × 1.5	☐
Rotating washing brush				
Rotating wash brush for < 800 l/h machines, nylon bristles	241	4.113-004.0	The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 × 1.5, replaceable brush insert).	☐
Rotating wash brush for > 800 l/h machines	242	4.762-559.0	Versatile, low-foaming PressurePro Intensive Deep Cleaner RM 750 suitable for use with high-pressure and surface cleaners as well as scrubber dryers. The powerful detergent was specially developed for the high demands in production and industry – in particular the food industry and commercial kitchens. It removes typical stubborn dirt and residues caused by oil, grease, soot, protein, fruit juice, wine or beer from surfaces and is also suitable for deep cleaning heavily soiled industrial floor coverings. The highly concentrated industrial cleaner can be dosed very sparingly and is therefore particularly economical to use. If necessary, it can also be used for manual cleaning.	☐
	243	4.762-562.0	Thanks to its broad efficacy spectrum, the acidic PressurePro Active Cleaner RM 25 from Kärcher can be used in numerous applications for thorough cleaning with high-pressure cleaners. The detergent effortlessly removes limescale, rust, beer stone and milk stone deposits as well as grease and albumen stains. It is therefore ideal for tank interior cleaning in the food industry, for deep cleaning of cold stores and cold-storage rooms as well as sanitary areas, such as in swimming pools or public toilets in motorway service areas, airports or train stations. The powerful combination of quick-cleaning surfactants, phosphoric and hydrochloric acid as well as effective corrosion protection to protect metals, cleans milk rooms and milking parlours in agriculture thoroughly and safely. In addition, the PressurePro Active Cleaner RM 25 can be used in very small amounts and therefore reduces material costs for cleaning.	☐
Rotating wash brush for < 800 l/h machines, natural bristles	244	4.113-003.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	☐
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Rotary cleaner head M63E	245	6.751-061.0	Compact interior cleaning head made of stainless steel for cleaning the interiors of drums and containers with openings of 65 mm or more. Offers an impressively low weight and constant rotation speed by means of an electric motor.	☐

☐ Available accessories.