

HD 8/18-4 ST

Easy to handle, robust and powerful: stationary cold water high-pressure cleaner with 800 l/h and 180 bar for continuous use in tough working conditions.



Made in Germany



Order no.

1.524-962.0

- 4-pole water-cooled motor and robust crankshaft pump with ceramic piston
- Easy installation, operation and maintenance of the machine

Technical data

EAN code		4066529057136
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow Rate	l/h	500 - 800
Operating pressure	bar / MPa	180 / 18
Max. Pressure	bar / MPa	240 / 24
Water feed temperature	°C	60
Power rating	kW	5.5
Fuse protection	A	16
Power cable	m	5
Water inlet		1"
Number of users		1
Mobility		stationary
Weight (with accessories)	kg	68
Weight incl. packaging	kg	77.8
Dimensions (L × W × H)	mm	800 × 605 × 600


This machine requires instruction.

Scope of supply

Servo Control
Power nozzle
Frame and cover: Steel, powder-coated
Prepared for Servo Control
Pre-equipped for a detergent inlet

Equipment

Crankshaft pump with ceramic pistons
Dry running protection
Large fine mesh water filter
Storage tank with float valve
Prepared for remote operation
RM1 dosage
Sight glass for oil level
Oil dipstick
Water-cooled motor

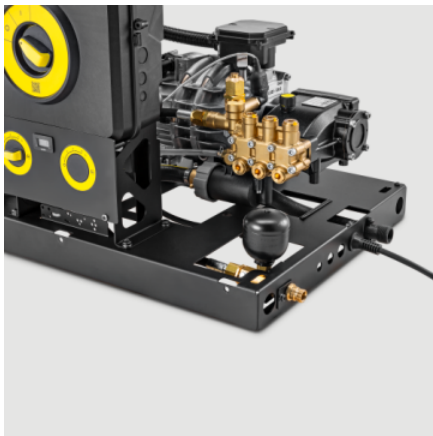

Durable and sturdy

- 4-pole water-cooled electric motor.
- Robust reciprocating pump with brass cylinder head and high-quality materials ensure a long service life.
- Reliable and durable Kärcher high-performance crankshaft pump ensures optimal pressure.



High-quality equipment

- Storage tank with float valve and dry-running protection.
- Robust frame and cover made of powder-coated steel.
- Ready for connection of remote controls.



Easy operation

- Just one rotary switch for all functions guarantees simple operation without long training times.
- Practical error display informs users immediately and saves time.
- Self-explanatory symbols and a clearly-arranged operating field for easy comprehension and increased productivity.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle 25°, 043	1	2.113-008.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■
Power Nozzle 25°, 045	2	2.883-398.0		□
Power nozzle 25°, 050	3	2.883-399.0		□
Power nozzle 25°, 047	4	2.113-009.0		□
Power Nozzle 25°, 052	5	2.883-400.0		□
Power Nozzle , 048	6	2.113-010.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	□
Power Nozzle , 055	7	2.883-401.0	Fan jet nozzle for large area coverage and stubborn dirt and stains.	□
HP nozzle spray angle 0°				
Power nozzle 0°, 045	8	2.113-033.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	□
Power Nozzle 0°, 045	9	2.884-534.0		□
Power nozzle 0°, 050	10	2.113-034.0		□
	11	2.884-535.0		□
Power nozzle 0°, 055	12	2.113-035.0		□
Power Nozzle 0°, 055	13	2.884-536.0		□
Power nozzle spray angle 15°				
Power nozzle 15°, 045	14	2.113-046.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□

■ Included in delivery. □ Available accessories.


EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 15°				
Power nozzle 15°, 055	15	2.113-047.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
Power Nozzle 15°, 045	16	2.883-389.0		☐
Power nozzle 15°, 055	17	2.883-390.0		☐
Power nozzle spray angle 40°				
Power Nozzle 40°, 045	18	2.113-053.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	☐
Power Nozzle 40°, 050	19	2.113-054.0		☐
Power Nozzle 40°, 045	20	2.884-523.0		☐
Power Nozzle 40°, 055	21	2.113-055.0		☐
Power Nozzle 40°, 050	22	2.884-524.0		☐
Power Nozzle 40°, 055	23	2.884-525.0		☐
TRIGGER GUNS				
Trigger guns				
Pistol TR 155°C with package	24	4.119-002.0	High-quality Classic spray gun with robust valve. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Pistol M22 155°C with package	25	4.760-843.0		☐
EASY!Force Advanced	26	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	☐
EASY!Force Food	27	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	☐
High-End HD Trigger Gun	28	4.118-011.0	Robust, durable high-end spray gun for use in the food industry and industry. Very low pressure loss – even with water volumes up to 2500 l/h.	☐

☐ Available accessories.


EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0

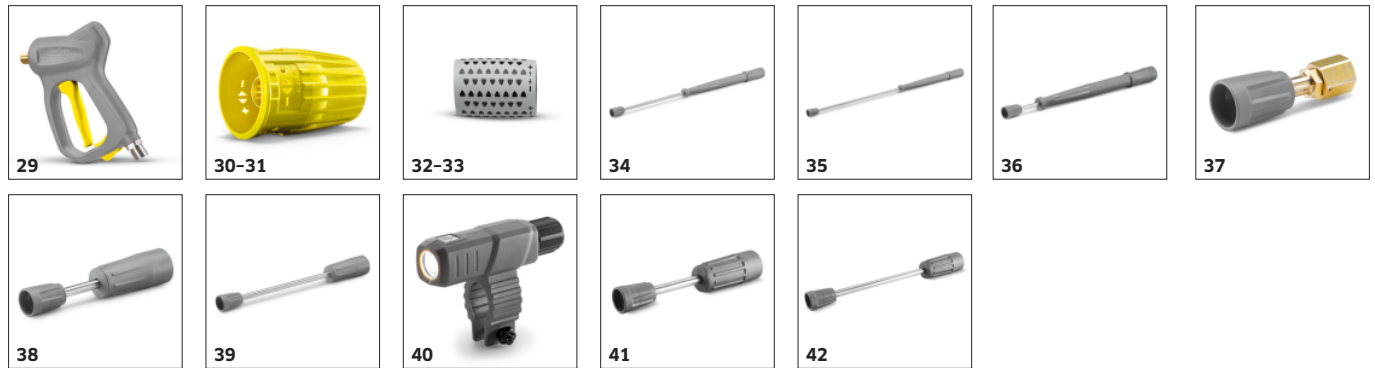

		Order no.	Description	
TRIGGER GUNS				
Trigger guns				
High-end HP Food trigger gun	29	4.775-825.0	High-end spray gun with optimised flow. Low pressure losses, even with water flows of up to 2,500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best prerequisites for use in the food industry and for commercial use. Connector for HD hoses M 22 × 1.5.	☐
Servo Control				
Servo Control, 750 l/h – 1100 l/h	30	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
Servo Control, food, 750 l/h – 1100 l/h	31	4.118-016.0	Water flow and pressure control on the trigger gun. Food-grade, parts in contact with water are stainless steel.	☐
Servo Control, 750 l/h – 1100 l/h	32	4.775-470.0	Water flow and pressure control on the trigger gun.	☐
Servo Control, stainless steel version, 750 l/h – 1100 l/h	33	4.775-800.0	Lime deposits in excessively hard water and corrosion in excessively soft water are the natural enemies of hot water high-pressure cleaners. The PressurePro Machine Protector Advance 2 RM 111 from Kärcher offers maximum protection against black water and lime deposits in the heating coil (up to 150 °C) and also effectively protects all water-conducting parts against corrosion. Pump care additives additionally ensure continuous lubrication and care of the high-pressure pump. The care agent, which was developed specially for use in HDS machines with system care adaptation, thereby helps to significantly extend the lifetime of important components, reduce pitting and lower the maintenance costs. The practical Advance bottle can be used directly on the machine and enables quick and easy use.	☐
SPRAY LANCES				
Rotating spray lances				
Jet pipe with transport packaging, 840 mm	34	4.119-003.0	Rotating Classic spray lance with ergonomic handle bowls in a robust and high-quality stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 1050mm with package, 1050 mm	35	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 600mm with package, 600 mm	36	4.119-009.0	Rotating Classic spray lance with ergonomic handle bowls in a robust and high-quality stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 100mm, 100 mm	37	4.119-013.0		☐
Jet pipe Classic TR 200mm, 200 mm	38	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	39	4.119-015.0		☐
LED nozzle light	40	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	☐
Spray lance, 250 mm, rotatable	41	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐
Spray lance, 400 mm, rotatable	42	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐

☐ Available accessories.


EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0

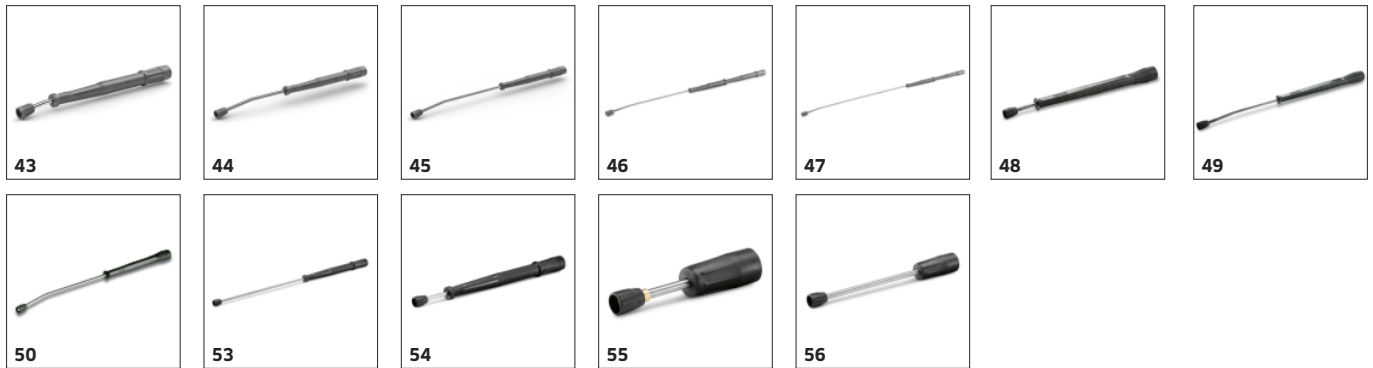

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 600 mm, rotatable	43	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	44	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	45	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	46	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	47	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 600 mm, rotatable	48	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	49	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	50	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	51	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	52	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance				
Jet pipe TR 1050mm with package	53	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	54	4.760-856.0		☐
Jet pipe Classic M 200mm	55	4.760-887.0		☐
Jet pipe Classic M 400mm	56	4.760-888.0		☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0

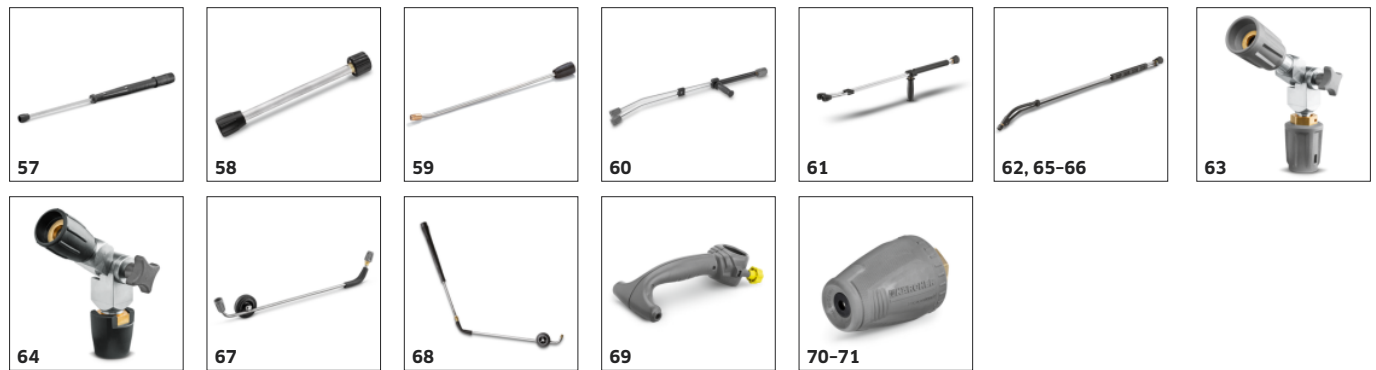

		Order no.	Description	
SPRAY LANCES				
Spray lance				
Jet pipe Classic M 840mm	57	4.760-895.0	Optimal for use with medium and hard water: the PressurePro Machine Protector Advance 1 RM 110 for hot water high-pressure cleaners with system care adaptation offers comprehensive protection for the heating coil system at water temperatures of up to 150 °C. As such, RM 110 ensures a constant water flow, preventing reductions in performance, saving energy and significantly extending the lifetime. It also helps to reduce expensive decalcification measures for the heating coil and generally reduce the maintenance costs. In addition, the care agent is HACCP-compliant, making it suitable for use in food-processing companies, and very easy to use since the practical Advance bottle can be used directly on the machine.	☐
250 mm lance, non-rotatable	58	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
550 mm lance, non-rotatable	59	4.760-665.0	550 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Double lance				
Double lance, 960 mm	60	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
	61	6.394-665.0		☐
Flexible spray lance				
Flexible lance, 1050 mm	62	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
High pressure articulated joint	63	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	☐
	64	4.481-039.0	High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	☐
Jet pipe flexible 0,85m, 850 mm	65	6.394-655.0	With the special PressurePro Machine Protector RM 110 for use in applications with medium to hard water, hot water high-pressure cleaners and their most important components as well as water-conducting parts are reliably protected against lime deposits. As a result, the water flow through the heating coil is ensured and the unit performance remains constant, while users can save energy and massively reduce maintenance costs for time-consuming decalcification measures at the same time. The PressurePro Machine Protector RM 110 is HACCP-compliant and therefore suitable for use in food-processing companies.	☐
Flexible lance, 1050 mm	66	6.394-654.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
Undercarriage spray lance				
Underbody lance	67	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
	68	4.760-245.0		☐
Additional handle				
Additional handle for EASY!Lock spray lances	69	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt Blaster, small				
Dirt blaster, small, 045	70	4.114-021.0	Up to 50% higher cleaning and area performance than its predecessor: with the new performance dirt blaster (nozzle size 045), power losses have been minimised and the spray quality maximised.	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt Blaster, small				
Dirt blaster, small, 050	71	4.114-022.0	The decalcifying agent is instantly effective on all inorganic deposits: the PressurePro Descaling Acid RM 101 from Kärcher quickly removes even the most stubborn lime and detergent residue while also offering lasting corrosion protection in the water-conducting parts of cold and hot water high-pressure cleaners. RM 101 can restore the performance of calcified heating coils, thereby increasing the water flow, reducing the energy consumption while cleaning and improving the overall unit performance.	☐
Dirt blaster, 045	72	4.767-232.0	Our gel-like PressurePro Facade Cleaner RM 43 is the comprehensive cleaning solution to protect house facades from weather and other influences in the long term, to retain their value and to reduce expensive renovation measures. Whether it's stone, clinker, rough-cast plaster, plastic, wood or glass facades: rain and moisture affect them just as much as heat and drought, wind, hail, snow and ice or exhaust fumes from traffic and emissions from heating systems and industry. The result is deposits and soiling; even moss, algae and fungi can take hold and cause lasting damage to the surface. Thanks to its gel consistency, PressurePro Facade Cleaner RM 43 adheres excellently to virtually any type of surface and reliably and effectively removes soot, oil, grease and environmental pollution. It is, of course, perfectly designed for efficient interaction with the tools from the Kärcher system solution for facade cleaning.	☐
Dirt blaster, 050	73	4.767-233.0	Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor.	☐
Dirt blaster, large				
Dirt blaster Vibrasoft, 050	74	4.114-066.0	Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics.	☐
Dirt blaster, large, 045	75	4.114-042.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, large, 050	76	4.114-027.0		☐
Dirt blaster, 050	77	4.763-253.0		☐
Classic rotary nozzle				
Rotor nozzle TR 050	78	4.119-024.0		☐
Rotary nozzle M 050 with package	79	4.760-870.0		☐
ECO!BOOSTER				
eco!Booster TR 045	80	2.113-087.0	eco!Booster with 50% more area performance than the Kärcher power nozzle; suitable for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 045).	☐
eco!Booster TR 050	81	2.113-088.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 050).	☐
Eco!Booster MAX TR 045	82	2.113-096.0	Maximum efficiency and versatility in professional cleaning. The eco!Booster MAX offers more than double the area performance and ergonomic handling.	☐
Eco!Booster MAX TR 050	83	2.113-097.0		☐
REMOTE CONTROL				
Emergency stop switch – for installation in remote control 2.744-015	84	6.635-434.0		☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



86




87




88



89-90



91, 94-95



92-93



96



97, 106



98

		Order no.	Description	
REMOTE CONTROL				
Emergency stop switch - for installation in remote control 2.744-015	85	6.651-485.0		☐
Remote control	86	2.637-491.0	Remote release button for stationary high-pressure cleaners from Kärcher: resets the switch-off after 30 minutes of continuous operation or continuous pause.	☐
Remote control I-O, RM 1+2	87	2.744-014.0	Remote control for controlling a stationary cold water high-pressure cleaner. Functions: on/off and dosing of up to two detergents (RM1/RM2).	☐
Remote control, I-O, RM 1+2	88	2.744-015.0	Multi-key remote control for switching on and off and dosing up to two detergents (RM1/RM2). In conjunction with E-box 2.744-018.0.	☐
Add-on kit remote control 1 HD-HDS-St	89	2.744-017.0	Preparation for connecting rotary switch remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Add-on kit remote control 2 HD-HDS-St	90	2.744-018.0	Preparation for connecting push-button remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
CONTROL CABLE				
Control cable	91	6.647-222.0	Connection cable available as bulk stock (12 × 1.0 mm ²) for use as control cable. For all stationary HD/HDS machines from Kärcher.	☐
Control cable 3x 1.5 mm ² (price per meter)	92	6.641-059.0	Connecting cable 3 × 1.5 mm ² . Available by the meter.	☐
Control cable 5 × 1.5 m	93	6.641-061.0	Control cable 5 × 1.5	☐
Control cable 7 × 1.5 m	94	6.641-064.0	Control cable 7 × 1.5	☐
Control cable 10 × 1.5 m	95	6.641-082.0	Control cable 10 × 1.5	☐
Conduit	96	2.420-008.0	Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	☐
HIGH-PRESSURE PIPEWORK				
High-pressure pipe kit	97	2.420-006.0	High-pressure pipe kit with 3 m stainless pipe Ø 16 × 2 mm, ID 12 and mounting accessories: compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Connector pipe/high-pressure hose, stainless steel	98	2.638-181.0	Stainless steel	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
HIGH-PRESSURE PIPEWORK				
Connector pipe/stop valve, stainless steel	99	2.638-183.0	For stationary HD/HDS machines: Stainless steel transition piece comprising double nipple, union nut and cutting ring. For connecting the pipe to the shut-off valve.	☐
Shut-off valve, stainless steel	100	4.580-163.0	Stainless steel shut-off valve with M 22 × 1.5 thread suitable for connecting pipeline and high-pressure hose for stationary high-pressure systems from Kärcher.	☐
	101	6.386-428.0	(VA)	☐
Union nut, stainless steel	102	6.386-465.0	Stainless steel	☐
Stainless steel elbow union 90°	103	6.386-466.0	Stainless steel elbow union 90° with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Connector, galvanised steel	104	2.638-180.0	Alternativ : stainless steel 2.638-181	☐
Shut-off valve, galvanised steel	105	4.580-144.0	Shut-off valve made from zinc-coated steel for stationary high-pressure systems from Kärcher. For connecting the pipeline to the high-pressure hose.	☐
Pipe kit, galvanised steel, 3 m	106	2.420-004.0	High-pressure pipe kit with 3 m galvanised steel pipe Ø 16 × 2.5 mm, DN 11 and fixing accessories: Compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Tee, galvanised steel	107	6.386-269.0	Tee (90°), galvanised steel with compression fitting for 16 mm pipes. Fixing material (Ermeto) included.	☐
Elbow union, galvanised steel	108	6.386-356.0	Elbow union, galvanised steel. With 90° angle piece with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Pipe insulation, per running meter	109	6.286-147.0	For thermal insulation of pipes. Pipe cladding. Wall thickness 9 mm. PE foam with moisture barrier. Available per running meter.	☐
Adapter piece, galvanised steel	110	2.638-182.0	Alternative: stainless steel 2.638-183	☐
Union nut, galvanised steel	111	6.386-423.0	Union nut, galvanised steel. For 16 mm compression fitting.	☐
Cutting ring	112	6.386-357.0	Galvanised steel cutting ring. For 16 mm compression fitting.	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
PLANT INSTALLATION				
Fine-mesh water filter	113	2.209-806.0	Fine-mesh water filter	☐
Emergency Stop switch	114	2.744-002.0	Emergency Stop switch with ISO housing for wall mounting. With 0.4 m power cord and fixing material.	☐
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
Rail holder	115	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	☐
C-rail, per running metre	116	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	☐
Rail connector	117	6.541-011.0	Rail connector	☐
End stop	118	6.541-025.0	End stop	☐
Cable trolley	119	6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	☐
End bracket	120	6.541-028.0	End bracket	☐
Handle	121	6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	☐
Wall bracket	122	6.541-039.0	Wall holder for galvanised steel C-rail profile.	☐
Rail holder wall	123	6.541-012.0	Galvanised steel rail bracket for C-rail profile. Weight 0.235 kg.	☐
Spray lance runner, movable	124	4.042-610.0	moveable	☐
SEALS FOR TRAPEZOIDAL THREAD				
Spare part set seals TR	125	2.880-001.0		☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	126	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle connector	127	5.401-210.0	For protecting and connecting Kärcher power nozzles to spray lances (M 18 × 1.5 IG).	☐
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 20 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	128	6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	129	6.110-019.0	High-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Suitable for pressures up to 315 bar. Length: 10 m.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	130	6.390-025.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	131	6.390-185.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	132	6.390-171.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock	133	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × M22 × 1.5	134	6.391-342.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × M22 × 1.5	135	6.390-010.0	With screw connections on both sides, M 22 × 1.5 with bend protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × M22 × 1.5	136	6.390-031.0	Screw connections at both ends, M 22 × 1.5, with kink protection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	137	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 15 m, ID 8, 315 bar	138	6.110-033.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and equipped with time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	139	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 × M22 × 1.5	140	6.390-023.0	Connectors at both ends, M 22 × 1.5, with kink protection.	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	141	6.110-032.0	20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.	☐
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	142	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock	143	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	144	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	145	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	146	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	147	6.110-060.0	With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar.	☐
Longlife 400				
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	148	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose.	☐
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	149	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	150	6.390-208.0	20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	151	6.110-024.0	1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	152	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	153	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5).	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	154	6.110-038.0	Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure.	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	155	6.110-023.0	Robust high-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, for up to 400 bar pressure.	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	156	6.391-354.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	157	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	158	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	159	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	160	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	161	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × M22 × 1.5	162	6.389-479.0	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × M22 × 1.5	163	6.389-581.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	☐
Longlife food industry version				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	164	6.110-075.0		☐
Longlife food industry version with unions on both sides				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	165	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	166	6.110-054.0	Durable high-pressure hose with double steel reinforcement and blue, non-marking and animal fat resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	167	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	☐
Ultra Guard				
High-pressure hose Ultra Guard, 20 m, ID 8, max. 315 bar	168	6.110-083.0	Ultra Guard high-pressure hose with smooth and extremely hard-wearing coating. Robust hose line for maximum service life in the toughest conditions.	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



169



170-172



173-174



175-176



177-179



180



181



182

		Order no.	Description	
HIGH-PRESSURE HOSES				
Classic				
High-pressure hose Classic, 10 m, ID 8, 315 bar × , EASY!Lock	169	4.119-005.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , EASY!Lock	170	4.119-006.0		☐
Hose TR DN8 31,5MPa 30m with package, 30 m, ID 8, 315 bar × , EASY!Lock	171	4.119-007.0		☐
Hose assembly with package TR DN8 max31,, 15 m, ID 8, 315 bar × , EASY!Lock	172	4.119-017.0		☐
Hose assembly with package TR DN10 25MPa, 20 m, ID 10, 250 bar × , EASY!Lock	173	4.119-019.0		☐
Hose assembly with package TR DN10 25MPa, 40 m, ID 10, 250 bar × , EASY!Lock	174	4.119-020.0		☐
Hose with transport packaging, 10 m, ID 8, 315 bar × , M22 × 1.5	175	4.760-834.0		☐
Hose M DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , M22 × 1.5	176	4.760-857.0		☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 max.2	177	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	178	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Hose assembly TR pipe cleaning DN6 max.2	179	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	180	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning nozzle				
Dirt blaster pipe cleaning D21/040	181	4.765-001.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Dirt blaster pipe cleaning D30/040	182	4.765-004.0		☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
PIPE CLEANING				
Pipe cleaning nozzle				
Pipe cleaning nozzle	183	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	☐
	184	5.763-016.0		☐
		185	5.763-017.0	Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 × 30° backwards, diameter 30 mm.)
Rotating pipe cleaning nozzle	186	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	☐
FLOOR AND HARD SURFACE CLEANER				
Hard surface cleaner FR Classic				
Surface cleaner medium M with package	187	4.760-876.0		☐
Hard Surface Cleaner FRV 30				
FRV 30	188	2.111-010.0	With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C.	☐
	189	2.642-999.0	With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. There is no longer a need to rinse the surface after cleaning, as the dirty water can be removed through the 5m suction hose, which is supplied. Additional features include the non-marking steering rollers and double ceramic bearings. Machine specific nozzle kit must be ordered separately.	☐
Extension hose 5 m	190	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	☐
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	191	2.111-011.0	Up to 10 times greater area coverage compared with the conventional high pressure jet.	☐
Surface Cleaner FR 30	192	2.642-997.0		☐
Hard surface cleaner FR 30 ME				
FR 30 ME surface cleaner	193	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
	194	2.640-355.0		☐
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	195	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
	196	2.640-679.0		☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 650 l/h - 850 l/h	197	2.639-187.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 045	198	2.642-432.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	☐
Nozzle kit for FRV, 050	199	2.642-433.0		☐
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	200	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	☐
FRV 30 ME	201	2.642-911.0		☐
Extension hose FRV 30 Me and FRV 50 Me	202	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	203	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C.	☐
FRV 50 ME	204	2.643-598.0		☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 2, 700 l/h - 800 l/h	205	4.112-064.0	Developed for Kärcher high-pressure cleaners without servo control: The cup foam lance Advanced 2 impresses with a main body made of Ecobrass for use with aggressive cleaning agents.	☐
Two-litre cleaning agent container for DUO Advanced foam lance	206	4.112-066.0	The additional two-litre container enables detergent to be changed quickly with the Kärcher Basic, Advanced and DUO Advanced cup foam lance.	☐
Cup foam lance DUO Advanced 2, 700 l/h - 800 l/h	207	4.112-068.0	For pressure washers without Servo Control: The DUO Advanced 2 cup foam lance is impressive with its option for direct switching to high-pressure cleaning and two-litre detergent tank.	☐
Cup foam lance Basic 2, 700 l/h - 800 l/h	208	4.112-054.0	Newly developed, very robust Basic 2 cup foam lance especially for high-pressure cleaners with a flow rate of 700-800 l/h. For excellent foam quality with half the cleaning agent consumption.	☐
Cup foam lance Advanced	209	6.394-969.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance basic	210	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance, 1200 l/h -	211	6.394-668.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance advanced	212	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
Inno Foam Set				
Inno foam kit with detergent injector	213	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Inno foam kit	214	2.112-008.0		☐
Inno foam kit with detergent injector	215	2.640-151.0		☐
Inno foam kit	216	2.640-692.0		☐
Easy Foam Set				
Easy Foam Set with RM injector	217	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Easy foam set	218	2.112-011.0		☐
Easy Foam Set with RM injector	219	2.640-691.0		☐
Easy foam set	220	2.640-693.0		☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	221	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
Nozzle kit 110 Inno/Easy set 1000 - 1300 l/h	222	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	☐
MIXERS AND INJECTORS				
HP detergent injector				
Detergent injector for high and low pressure (without nozzles)	223	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
	224	3.637-001.0		☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
MIXERS AND INJECTORS				
Nozzle insert with order no. 3.637-001				
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	225	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Low pressure for units rated up to 1100 l/h	226	4.769-001.0	For low pressure with machines up to 1.100 l/h	☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	227	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
Connector				
Nozzle connector/screw connector	228	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 x M 22 x 1.5/1 x M 18 x 1.5.	☐
Short spray unit	229	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Y distributor	230	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	231	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	232	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	233	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter M22 - Swivel	234	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	235	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	236	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	237	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	238	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐

☐ Available accessories.


EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0



		Order no.	Description	
COUPLING PARTS				
Adapter EASY!Lock				
Coupler -2xTR22 - EASY!Lock	239	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
ADAPTER for replacement TR22IG-M22AG Er	240	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels				
Automatic hose reel, powder-coated steel / plastic, 20 m	241	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	242	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	243	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	244	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	☐
Automatic hose reel, stainless steel, includes swivel holder, 20 m	245	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	246	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 1/2"	247	6.388-461.0	with hose liner	☐
With hose nozzle, R 3/4"	248	6.388-455.0		☐
With hose nozzle, R 1"	249	6.388-465.0	with hose barb	☐
With female thread, R 3/4"	250	6.388-473.0	with female thread	☐
Hose coupling	251	6.388-458.0		☐
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
Add-on kit cleaning agents double	252	2.209-006.0	The attachment kit makes it easy to dose a second detergent by remote control.	☐

☐ Available accessories.

EQUIPMENT FOR HD 8/18-4 ST 1.524-962.0

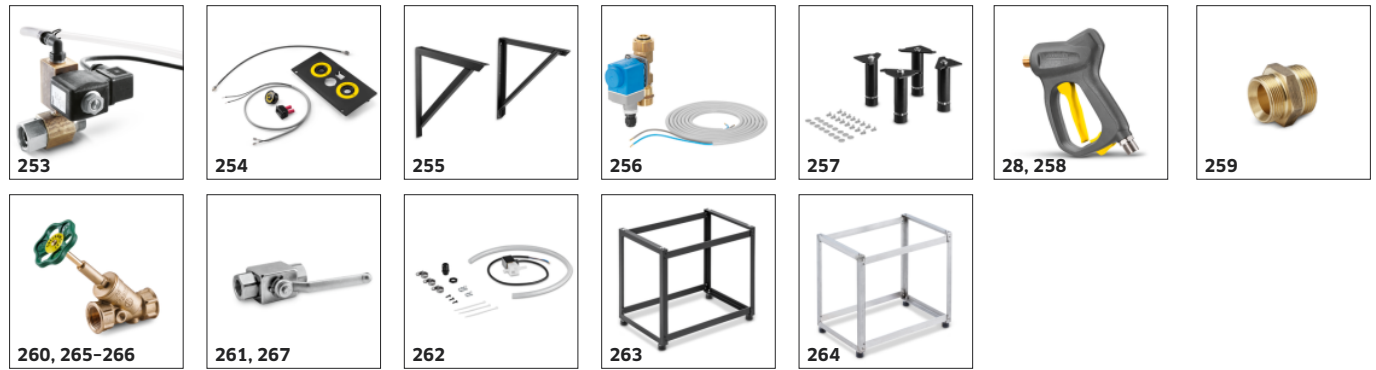

		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
Add-on kit pressure discharge	253	2.209-007.0	Attachment kit for automatic pressure relief for stationary cold and hot water high-pressure cleaners. For effective protection of the high-pressure system.	☐
Add-on kit hour counter pressure gauge	254	2.209-008.0	Attachment kit with hour counter and pressure gauge for stationary cold and hot water high-pressure cleaners. For easy control of the machine's operating time and operating pressure.	☐
Wall bracket complete	255	2.209-009.0	The wall bracket enables easy and safe installation of a stationary high-pressure cleaner (cold or hot water) on the wall.	☐
Add-on kit solenoid valve	256	2.209-010.0	Water inlet solenoid valve attachment kit for stationary cold and hot water high-pressure cleaners. The solenoid valve automatically closes the water supply to the high-pressure cleaner when the machine is at a standstill.	☐
Add-on kit stand foot	257	2.638-276.0	The attachment kit enables stationary high-pressure cleaners from Kärcher to be installed on the ground in a versatile and stable manner. The machine is securely positioned 200 mm from the floor.	☐
Trigger gun	258	4.775-018.0		☐
Double connecting	259	5.402-001.0		☐
Full-bore valve	260	6.412-021.0		☐
High-pressure ball valve	261	6.412-066.0		☐
Add-on kit cleaning agents single	262	2.209-005.0	The attachment kit makes it easy to dose the detergent via remote control.	☐
Ground rack complete	263	2.210-001.0	Steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W × H × D: 800 × 740 × 540 mm.	☐
	264	2.210-002.0	Stainless steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W × H × D: 800 × 740 × 540 mm.	☐
STATIONARY HIGH-PRESSURE CLEANERS				
Full-bore valve	265	6.412-022.0		☐
	266	6.412-027.0		☐

☐ Available accessories.