

## SP 22.000 DIRT LEVEL SENSOR

The SP 22,000 Dirt Level Sensor submersible dirty water pump handles challenging drainage, pumping up to 22,000 l/h with an integrated prefilter and level sensor.



Order no.

1.645-852.0

- Connecting Hose

### Technical data

EAN code		4054278994505
Rated input power	W	750
Max. Flow Rate	l/h	< 22000
Delivery Temperature	°C	max. 35
Delivery Head	m	8
Pressure	bar	max. 0.8
Grain Size	mm	max. 30
Depth of Immersion	m	max. 7
After-Running Time	s	15
Min. Residual Water, manual	mm	35
Residual Water Height	mm	35
Connecting Thread		G1 1/2
Power Cable	m	10
Voltage	V	230 - 240
Frequency	Hz	50
Colour		Yellow
Weight without accessories	kg	6.7
Weight incl. packaging	kg	7.6
Dimensions (L × W × H)	mm	238 × 293 × 354

### Scope of supply

Connecting Hose: 1", 1 1/4", 1 1/2"

### Equipment

Comfortable Carrying Handle

Easy hose connection thanks to Quick Connect

Switching between manual/automatic operation: Switch on the pump


Level Sensor: Continuous switching level definition

Integrated Stainless Steel Prefilter

In automatic operation (auto), the pump automatically switches with the water level

In manual operation, the pump runs continuously until the minimum quantity of residual water is reached

Ceramic Face Seal

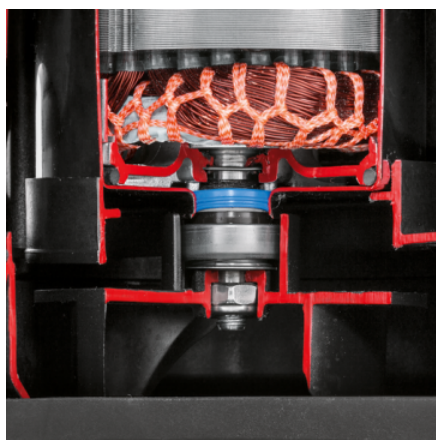


### Ceramic Face Seal

- For an extra long lifetime.



### Level Sensor


- For continuously variable definition of the switch-on and switch-off points of the pumps.

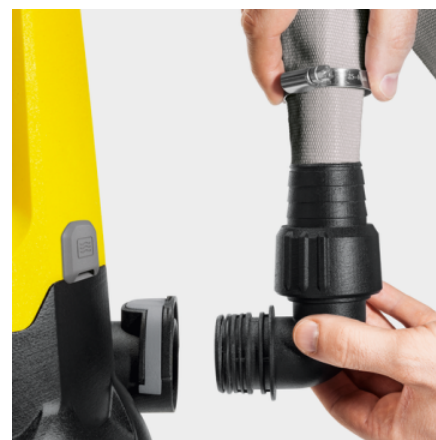

### Quick Connect

- Connection thread for quick and uncomplicated connection of 1", 1 1/4" and 1 1/2" hoses.

## EQUIPMENT FOR SP 22.000 DIRT LEVEL SENSOR 1.645-852.0

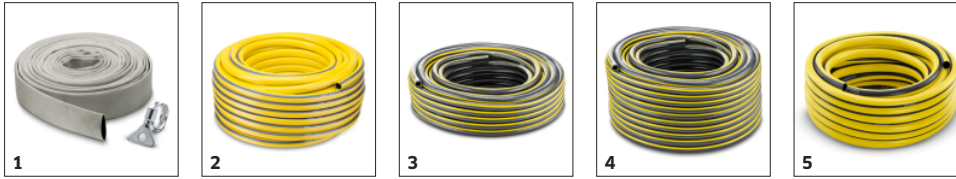

		Order no.	Description	
<b>MISCELLANEOUS</b>				
Flat Hose Set	1	2.997-100.0	The Kärcher flat hose set is the perfect addition to your pump. An ideal hose for pumping out dirty water from your flooded area.	<input type="checkbox"/>
<b>HOSES</b>				
PrimoFlex 1" 1m	2	2.645-247.0		<input type="checkbox"/>
Hose Performance Plus 3/4" -25m	3	2.645-322.0	Robust and extremely resistant to kinks, the Performance Plus garden hose is made from high-quality multi-layered woven material - for proven quality and performance.	<input type="checkbox"/>
Hose Performance Plus 3/4" - 50m	4	2.645-323.0		<input type="checkbox"/>
PrimoFlex® hose 3/4" - 25 m	5	2.645-142.0	PrimoFlex® quality garden hose (3/4") 25 m. Pressure-resistant, reinforced braided. Unharmful to health. Bursting pressure: 24 bar. Wide operating temperature range from -20 to 65 °C.	<input type="checkbox"/>

Available accessories.