


OSCILLATING SPRINKLER OS 5.320 S

Oscillating sprinkler OS 5.320 S for watering medium-sized and large areas and gardens. Adjustable flow control (0-max.). Covers up to 320 m².

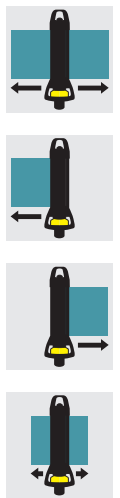

Order no.

2.645-134.0

Technical data

EAN code		4039784426344
Width of spray 2 bar	m	12
Width of spray 4 bar	m	16
Area coverage 2 bar	m	5 - 16
Area coverage 4 bar	m	6 - 20
Colour		black
Weight	kg	0.8
Weight incl. packaging	kg	0.9
Dimensions (L × W × H)	mm	546 × 160 × 88



Continuous reach adjustment

- Precise watering.

Loop for hanging the device integrated into the handle

- For simple storage/hanging.

Adjustable width of spray

- Different spray angles for targeted watering.

COMPATIBLE MACHINES

- Wassertimer WT 5

EQUIPMENT FOR OSCILLATING SPRINKLER OS 5.320 S 2.645-134.0



		Order no.	Description	
HOSES				
PrimoFlex® plus hose 1/2" - 20 m	1	2.645-144.0	20 m PrimoFlex® plus quality garden hose (1/2"). Pressure-resistant, reinforced braided. Unharmful to health. Bursting pressure: 45 bar. Wide operating temperature range from -20 to 65 °C.	<input type="checkbox"/>
CONNECTORS/TAP ADAPTORS				
Universal hose coupling Plus	2	2.645-193.0	Universal hose coupling plus with soft plastic recessed grips for comfortable handling. Compatible with all click systems.	<input type="checkbox"/>
Universal hose coupling Plus with Aqua Stop	3	2.645-194.0	Universal hose coupling plus with Aqua Stop and soft plastic recessed grips for comfortable handling. Compatible with all click systems.	<input type="checkbox"/>
Tap connector 3/4" thread with 1/2" thread reducer	4	2.645-006.0	Extremely tough tap connector 3/4" thread with 1/2" thread reducer. The reducer allows connection to two thread sizes. Compatible with all click systems.	<input type="checkbox"/>

Available accessories.