

IVR-B 30/15

Small, powerful IVR-B 30/15 build-in unit with stainless steel container and three phase side channel blower. Versatile use. Perfect for press remnants, shavings or coarse dust.



Order no.

9.989-416.0

- Compact dimensions.
- Freestanding stainless steel collection container

Technical data

EAN code		4054278695105
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50 - 60
Air flow	l/s / m³/h	58 / 210
Vacuum	mbar / kPa	200 / 20
Container capacity	l	30
Rated input power	kW	1.5
Vacuuming type		Electric
Nominal size		DN 50
Accessory nominal size		DN 50
Sound pressure level	dB(A)	77
Main filter dust class		M
Filter area for main filter	m²	1
Weight without accessories	kg	52
Weight incl. packaging	kg	52.6
Dimensions (L × W × H)	mm	810 × 575 × 520

Equipment

Container emptying: Set down chassis



Compact dimensions.

- The compact size makes it suitable for a range of different applications.
- Easy storage and attachment between, on or under production machines.
- Powerful side channel blower facilitates diverse applications.



Freestanding stainless steel collection container

- The collection container can be lifted off the base plate of the machine.
- Safety clips on the lid enable safe transport.




Wear-resistant side channel compressor

- Compact machine with 1.5 kW rated input power for vacuuming solids.
- For strong suction power and service life of at least 20,000 hours.
- Optimally suited for mobile use in multiple shift operation.

EQUIPMENT FOR IVR-B 30/15

9.989-416.0

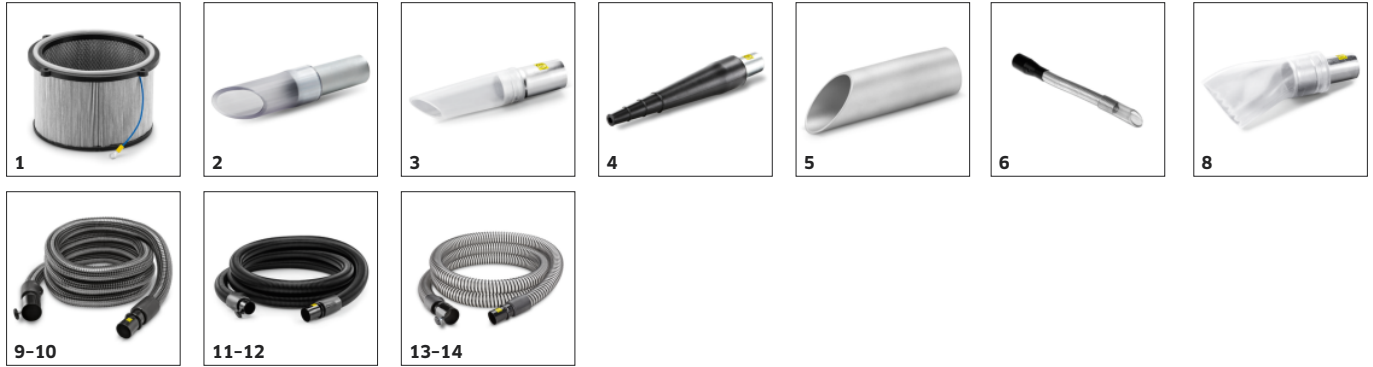

		Order no.	Description	
FILTERS				
Cartridge filters				
Cartridge filter 1,0m³,Kat. "M";ø240x152	1	9.989-531.0		■
NOZZLES				
Standard nozzles				
Standard nozzle PVC DN50	2	9.989-673.0	Electroconductive standard PVC nozzle. DN 50.	☐
Nozzle elastic silicon DN52	3	9.988-402.0		☐
Standard nozzle rubber cuttable DN50	4	9.989-675.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 50.	☐
Standard aluminium nozzle DN50	5	9.980-749.0	Diagonal nozzle made from anodised aluminium, electroconductive, DN 50.	☐
Standard nozzles bendable				
Nozzle, zinc coated, flexible, with rubber tip	6	9.981-421.0	Electroconductive, flexible round nozzle made from galvanised steel, DN 50, with rubber mouthpiece DN 30.	☐
Crevice nozzles				
Crevice nozzle, lightweight plastic	7	9.988-117.0	Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 52.	☐
Surface nozzles				
Nozzle with connecting piece 90° DN50	8	9.988-119.0	Electroconductive rubber nozzle, angled, DN 50, suitable for use with foods.	☐
HOSES				
PVC				
Hose PVC DN50 3 m	9	9.989-615.0	Electroconductive PVC hose, DN 50. Temperature-resistant up to 85 °C. Length: 3 m.	☐
Hose PVC DN50 5 m	10	9.989-616.0	Electroconductive PVC hose, DN 50. Temperature-resistant up to 85 °C. Length: 5 m.	☐
EVA				
Extension hose EVA el. DN52 3m	11	9.988-090.0	Electroconductive hose with NW50. Suitable for temperatures up to 65°C. Length: 3 m.	☐
Extension hose EVA el. DN52 5m	12	9.988-091.0		☐
PU				
Hose PU DN50 3 m	13	9.989-619.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	☐
Hose PU DN50 5 m	14	9.989-620.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR IVR-B 30/15
9.989-416.0



		Order no.	Description	
HANDLES				
Hand grip 45°, DN 52 ohne Sterngriff	15	9.977-678.0	Electroconductive and 45° curved handle made from stainless steel. Inner cone DN 50.	☐

☐ Available accessories.