

NT 65/2 TACT²

High mobility and power, stamina, robustness and a wide range of practical equipment features make Kärcher Tact² vacuum cleaners sought-after specialists and all-rounders. The NT 65/2 Tact² comes with the full antistatic package as standard. This makes the job much easier in any situation where large quantities of fine dust need to be removed on a regular basis.



Order no. 1.667-286.0

- 65-litre container, complete antistatic system, push handle
- Tact² automatic filter cleaning for vacuuming very large quantities of fine dust
- Electrically conductive accessories, 360 mm Adv floor nozzle, Wet & Dry flat pleated filter

Technical data


EAN code		4039784714953
Number of current phases	Ph	1
Voltage	V	220 - 240
Frequency	Hz	50 - 60
Air flow	l/s	2 × 74
Vacuum	mbar / kPa	254 / 25.4
Container capacity	l	65
Container material		Plastic
Rated input power	W	max. 2760
Standard nominal width	ID 40	
Cable length	m	10
Sound pressure level	dB(A)	73
Colour		anthracite
Weight without accessories	kg	24.5
Weight incl. packaging	kg	31.3
Dimensions (L × W × H)	mm	575 × 490 × 880

Scope of supply

Suction hose length:	4 m
Suction hose type:	electrically conductive
Bend:	electrically conductive
Quantity of suction tubes:	2 Piece(s)
Suction tubes length:	550 mm
Suction tubes material:	Stainless steel
Wet/dry floor nozzle width:	360 mm
Crevice nozzle	
Drain hose (oil-resistant)	
Flat pleated filter:	Cellulose fibre material
Push handle	


Equipment

Automatic cut-out features at max. filling quality
Antistatic system
Filter cleaning: Automatic Filter Cleaning System Tact ²
Sturdy bumper
Protection class: I
Stop swivel castor

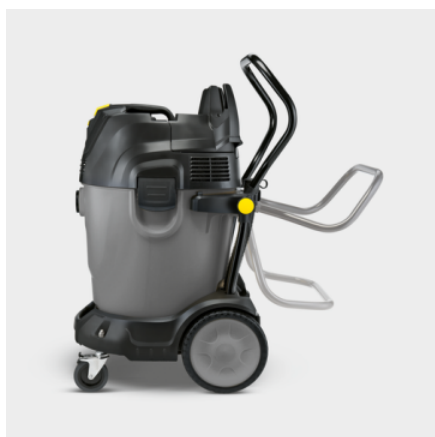

Easy transport

- Adjustable push handle and large wheels make transport easy even on uneven surfaces.

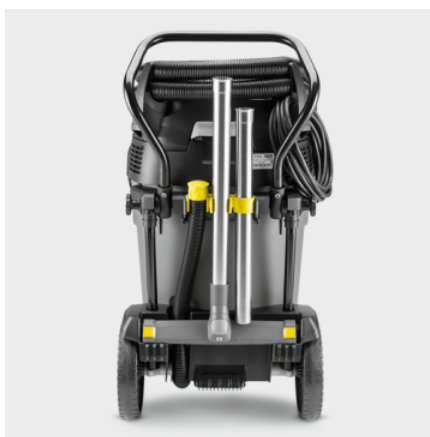

Smart accessory storage

- For example, the floor tool can be quickly fixed any way round.



Automatic Filter Cleaning System Tact²

- This divided flat pleated filter is cleaned by air blasts and can be removed from the clean side.
- Fine dusts cannot block the filter. A constant high air flow is maintained.
- Over 1000 kg of category A fine dust can be vacuumed without the need to change the filter.

EQUIPMENT FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M				
Flat pleated filter (paper)				
Flat pleated filter (paper)	1	6.907-276.0	Dry flat pleated filter made from cellulose fibre material with green label for vacuuming fine dust and coarse dirt of dust classes L and M for: NT 55/2 Tact ² , NT 65/2 Tact ² and NT 75/2 Tact ² Me.	■
Flachfaltenfilter (PTFE)				
Flat pleated filter, PTFE	2	6.907-449.0	Polyester fleece with PTFE coating, dust class M, for Tact ² vacuum cleaners. Particularly suitable for very adhesive materials.	□
Flat pleated filter (PES)	3	6.907-277.0	Wet & Dry flat pleated filter made from PES fibre material with PTFE coating with a blue label. Suitable for vacuuming liquids, fine dust and coarse dirt from the M and L dust classes.	□
BENDS				
Plastic bend				
Elbow electrically conducting packaged N	4	2.889-172.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	■
Plastic bend	5	5.031-718.0	DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
	6	5.031-939.0	Electrically conductive DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
	7	5.032-427.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend metal				
Bend, DN 35, metal	8	6.900-519.0	DN 35 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, stainless steel ID 35	9	6.903-141.0	Robust DN 35 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, DN 40, metal	10	6.900-276.0	DN 40 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The robust bend has a cone connection at both the hose end and the accessory end.	□
Bend, stainless steel ID 40	11	6.902-079.0	Robust DN 40 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool packaged NW40 360mm	12	2.889-153.0	Plastic Adv floor nozzle with width of 360 mm and nominal size of DN 40 for wet and dry vacuum cleaners from Kärcher. Features brush strips and squeegees that are easy to change.	■
Floor tool anthracite packaged NW35	13	2.889-173.0	Plastic floor nozzle in nominal size DN 35 for wet and dry vacuuming of fine dust, coarse dirt or liquids. Features brush strips and squeegees. Width: 300 mm.	□
Floor tool anthracite packaged NW40	14	2.889-174.0	Plastic floor nozzle with width of 360 mm and nominal size of DN 40 for wet and dry vacuuming of fine dust, coarse dirt or liquids. Features brush strips and squeegees.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool DN40-370	15	6.903-018.0	Aluminium floor nozzle with rollers, width of 370 mm and nominal size of DN 40 for wet and dry vacuum cleaners from Kärcher. Includes easy-to-replace brush strips and squeegees.	☐
Floor tool neutrally DN40	16	6.906-383.0	Aluminium floor nozzle with rollers, width of 450 mm and nominal size of DN 40 for wet and dry vacuum cleaning. The brush strips and squeegees that are included are easy to change.	☐
Floor tool neutrally DN35	17	6.906-384.0	For wet and dry vacuum cleaners from Kärcher: aluminium floor nozzle (DN 35) with a width of 370 mm, including brush strips and squeegees that are easy to change.	☐
Wet and dry floor nozzle	18	2.889-117.0	For wet and dry vacuum cleaners from Kärcher: plastic Adv floor nozzle with width of 400 mm and nominal size of DN 40. Includes easy-to-replace brush strips and squeegees.	☐
Crevice nozzles				
Crevice nozzle DN 40 300mm 1:50	19	5.130-655.0	Plastic crevice nozzle in nominal width DN 40 for Kärcher wet and dry vacuum cleaners. Especially suitable for vacuuming out areas that are difficult to reach, such as joints, crevices and corners.	☒
Crevice nozzle packaged NW35	20	2.889-130.0	With the DN 35 plastic crevice nozzle, corners and crevices can be vacuumed quickly and thoroughly. Length: 210 mm.	☐
Crevice nozzle	21	6.900-922.0	The metal crevice nozzle (DN 35) enables vacuuming in crevices and corners. Length: 500 mm.	☐
Crevice nozzle DN40	22	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	☐
All-purpose brushes				
All-purpose brush	23	6.903-863.0	Natural bristles (ox hair), bristle element 120 × 45 mm.	☐
Car cleaning nozzles				
Car nozzle, ID 40, 90 mm	24	6.900-952.0	For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.	☐
	25	2.840-095.0	Flat angled, convenient, plastic, DN 40 car cleaning nozzle specially designed for new Kärcher wet and dry vacuum cleaners with a clip system at the suction hose. Working width: Approx. 90 mm.	☐
Rubber suction tools, nose 45°				
Rubber suction tools, nose 45°	26	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	☐
	27	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	☐
Pipe dusting nozzles				
BRUSH	28	6.903-035.0	Plastic, pipe diameter 100 mm	☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION NOZZLES				
Pipe dusting nozzles				
BRUSH	29	6.903-036.0	Plastic, pipe diameter 200 mm	☐
SUCTION TUBES				
Suction tubes stainless steel				
Set suction tube stainless steel NW40 55	30	2.889-194.0	The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 40 and 550 mm long each). For Kärcher wet and dry vacuum cleaners.	■
Suction tube, DN 35	31	6.902-154.0	Suction tube made of high-quality stainless steel in DN 35 and 505 mm long for wet and dry vacuum cleaners from Kärcher.	☐
Suction tube, ID 40	32	6.902-081.0	Suction tube made of high-quality stainless steel in nominal width DN 40 and 550 mm long for wet and dry vacuum cleaners from Kärcher.	☐
Suction tube	33	6.906-531.0	The suction tube made of high-quality stainless steel (DN 40 and 1000 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	☐
Suction tubes metal				
Set suction tube chromed NW35 550mm	34	2.889-191.0	The suction tube set consists of 2 chrome-plated steel suction tubes for Kärcher wet and dry vacuum cleaners, nominal width DN 35 and each suction tube is 550 mm long.	☐
Suction tube DN35	35	6.900-514.0	The suction tube made of chrome-plated steel (DN 35, 505 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	☐
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Electrically conductive suction hose	36	2.889-141.0	The electrically conductive suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	■
	37	2.889-137.0	The electrically conductive suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐
Suction hose	38	2.889-138.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
	39	2.889-139.0	The suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐
Suction hose, oil-resistant	40	2.889-140.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐
Electrically conductive suction hose	41	2.889-142.0	The electrically conductive suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	☐
Extension hose packaged NW40 2.5m	42	2.889-146.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐

■ Included in delivery. ☐ Available accessories.

EQUIPMENT FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Repair set NW40	43	2.889-150.0	Repair kit ID 40 for the new clip system.	☐
Hose connection				
Adapter, DN 32/35, with internal thread	44	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.	☐
Adapter, DN 40 with internal thread	45	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.	☐
Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)				
Repair set, C 40	46	2.639-873.0	Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	☐
Extension hose, C 40	47	6.906-344.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose	48	4.440-678.0	The suction hose with bend in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose (clip system), C 40, 10 m	49	6.906-279.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose	50	6.906-321.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
	51	6.906-714.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete (Clip-system), C ID 40, 4 m, el.	52	4.440-728.0	The electrically conductive suction hose with bend and PFC module in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose (Clip-system), C 40, 16 m	53	6.906-635.0	The suction hose in nominal width DN 40 and with 16 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose (clip system), C 40, 10 m, el.	54	6.906-877.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hoses with cone connection				
Suction hose, complete	55	4.440-263.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 40, 4 m, oil-resistant,	56	4.440-303.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐

☐ Available accessories.

EQUIPMENT FOR NT 65/2 TACT² 1.667-286.0



		Order no.	Description	
SUCTION HOSES				
Suction hoses with cone connection				
Suction hose, complete	57	4.440-463.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete	58	4.440-466.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 40, 10 m, oil-resistant	59	4.440-612.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, complete	60	4.440-264.0	The suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 61, smooth inside	61	4.440-328.0	The suction hose in nominal width DN 50 and with 3 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, complete, DN 61, 10 m	62	4.440-467.0	The suction hose in nominal width DN 50 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 61, 4 m, oil-resistant	63	4.440-613.0	The oil-resistant suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 61, 4 m, el.	64	4.440-616.0	The electrically conductive suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
FILTER BAGS				
Fleece filter bags (3 ply)				
Fleece filter bags, 5 Piece(s), NT 65, NT 70, NT 72, NT 75, NT 90	65	2.885-753.0	Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	☐
Paper filter bags				
Paper filter bags, 5 Piece(s), NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC	66	6.904-285.0	Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	☐
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
HEPA surface filter	67	6.904-364.0	For wet and dry vacuum cleaners: HEPA-14 (H14) flat pleated filter made of high-quality glass fibre material. Suitable for vacuuming hazardous dusts, coarse dirt and liquids.	☐
Special filter bags, wet filter bags				
Special filter bags, wet filter bags	68	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	☐
Membrane filter / fabric filter				
Candle Filter - Wood, NT 65/2, NT 75/2	69	2.414-003.0	Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums.	☐
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	70	6.904-282.0	Polyester needle fleece membrane/fabric filter – BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	☐

☐ Available accessories.

EQUIPMENT FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
CONNECTING SLEEVES				
Y-adapter kit				
Y-adapter kit	71	2.637-217.0	Plastic distributor – suitable for NT vacuum cleaners.	☐
Connecting sleeve C-DN (clip on taper), EL (electroconductive)				
Connection cone NW35	72	5.407-005.0	Adapter clip system DN 35 for connecting suction tubes and small nozzles to cone DN 35. Perfect for vehicle interior cleaning, even without the connection of other nozzles.	☐
Connection cone NW40	73	5.407-006.0	For connecting small nozzles and suction tubes with cone DN 40: Adapter clip system DN 40. Ideal for vehicle interior cleaning tasks, with no need to connect additional nozzles.	☐
C-ID 35 adapter	74	5.407-112.0	C 35 hose connector for DN 35 accessory, electrically conductive.	☐
C 40 adapter	75	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	☐
C-DN 40 adapter	76	5.407-111.0	C 40 hose connector for DN 40 accessory, electrically conductive.	☐
Adapter for electric power tools, clip on, el.				
Sleeve for tool C35EL	77	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	☐
Adapter for electric power tools, C 35, el.	78	5.453-048.0	Inside Ø 25.4 mm, outside Ø 34.6 mm/ 38 mm, electrically conductive. Only NT vacuums.	☐
	79	5.453-050.0	Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive. Only NT vacuums.	☐
Adapter for electric power tools, screwable				
Power tool adapter, threaded, DN 35	80	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	☐
Adapter for electric power tools, screwable, ID 35	81	5.453-026.0	Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm.	☐
Power tool adapter, threaded, DN 35	82	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	☐
	83	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	☐
Reducing sleeves				
Reducer	84	5.407-108.0	Threaded reducer – from C-40 to DN 35. Suitable for NT vacuum cleaners.	☐

☐ Available accessories.

EQUIPMENT FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
CONNECTING SLEEVES				
Reducing sleeves				
Reducer	85	6.902-017.0	Reducer, enabling accessories (upholstery nozzle, crevice nozzle, etc.) with a DN 35 connection adapter to be connected to accessory parts (bend or suction tube) that have a DN 40 connection adapter.	☐
Sleeve C40 / C35	86	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.	☐
Reducer from ID 35 to 32	87	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	☐
Set reducing / extension sleeves				
Set reducing / extension sleeves	88	2.860-117.0	DN 40/35, DN 35/32 (tube -> nozzle), plastic.	☐
TARGET GROUP SPECIFIC VACUUM CLEANER ACCESSORY SETS				
NT vacuum cleaner kit, DN 40, el.	89	2.638-147.0	Wet and dry vacuum cleaner set with electrically conductive design, with nominal size 40.	☐
Car cleaning kit	90	2.862-166.0	Vehicle interior cleaning accessory kit in nominal width DN 35 for Kärcher wet and dry vacuum cleaners. The kit comprises various nozzles and adapter pieces in nominal widths DN 35 and DN 40.	☐
OTHER ACCESSORIES FOR T AND NT				
CS 40 Me	91	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.	☐
Adapter connection old elektr. leitend	92	5.031-436.0	Electroconductive adapter for connecting NT hoses with bayonet 1.0 connection of nominal widths DN 35, 40, 50 to the new accessory system for wet and dry vacuum cleaners from Kärcher.	☐
UBS NON-CONDUCTIVE MEDIA				
Add-on kit nonconducting media NT Tact ²	93	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	☐
EMPTYING SUPPORTS				
Shaving baskets				
Chip sieve	94	5.731-645.0	Plastic swarf sieve, perforated, with internal thread. For protecting the drain hose against very abrasive suction material such as coarse shavings.	☐

☐ Available accessories.