

NT 75/2 AP ME TC

High-performance, dual-motor wet/dry vacuum cleaner for professional use. Effective air-blast cleaning of the flat pleated filter maintains virtually constant cleaning power.



Order no. 1.667-292.0

- 75-l stainless steel container, 2 turbines, push handle, tilting chassis, drain hose
- Semi-automatic Ap filter cleaning, electronic filling level control
- 360 mm Adv floor nozzle, crevice nozzle, dry flat pleated filter

Technical data

EAN code		4039784727298
Number of current phases	Ph	1
Voltage	V	220 - 240
Frequency	Hz	50 - 60
Air flow	l/s	2 × 74
Vacuum	mbar / kPa	254 / 25.4
Container capacity	l	75
Container material		Stainless steel
Rated input power	W	max. 2760
Standard nominal width		ID 40
Cable length	m	10
Sound pressure level	dB(A)	73
Colour		silver
Weight without accessories	kg	26
Dimensions (L × W × H)	mm	700 × 505 × 995

Scope of supply

Suction hose length:	4 m
Bend:	Plastic
Quantity of suction tubes:	2 Piece(s)
Suction tubes length:	550 mm
Suction tubes material:	Stainless steel
Quantity of filter bags:	1 Piece(s)
Filter bag material:	Paper
Wet/dry floor nozzle width:	360 mm
Crevice nozzle	
Drain hose (oil-resistant)	
Flat pleated filter:	Cellulose fibre material
Tilting chassis	
Push handle	

Equipment

Automatic cut-out features at max. filling quality	
Filter cleaning:	Semi-automatic Ap filter cleaning
Sturdy bumper	
Protection class:	II
Stop swivel castor	




On-board practical storage

- Large on-board storage area for tool and accessory storage.



Integrated drain hose

- The easily accessible drain hose makes it easy to dispose of any liquids that have been sucked up.

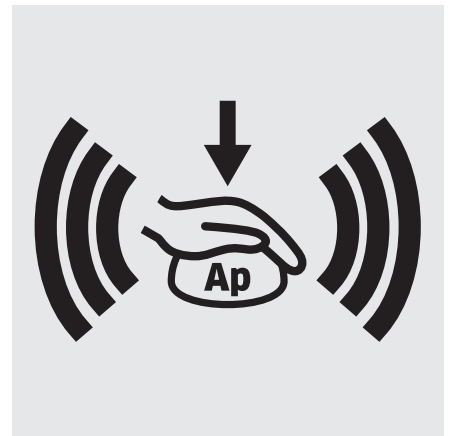


Semi-automatic Ap filter cleaning

- Semi-automatic filter cleaning effectively ensures constantly high suction power.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0

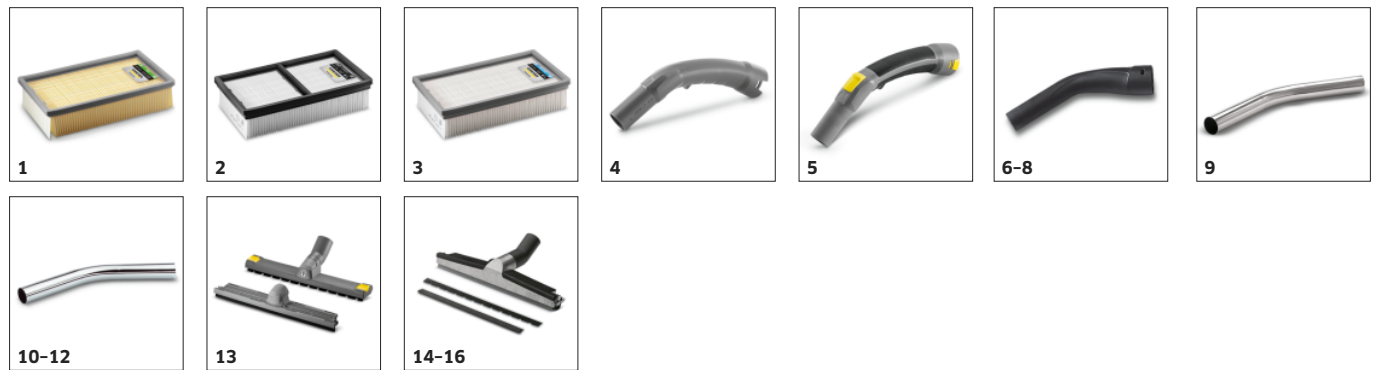

		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M				
Flat pleated filter (paper)				
Flat pleated filter	1	6.904-283.0	Dry flat pleated filter made from cellulose fibre material with a green label. Suitable for NT 65/2 Ap variants for vacuuming fine dust and coarse dirt of dust classes L and M.	■
Flachfaltenfilter (PTFE)				
Flat pleated filter, PTFE	2	6.907-449.0	Polyester fleece with PTFE coating, dust class M, for Tact ² vacuum cleaners. Particularly suitable for very adhesive materials.	□
Flat filters (PES)	3	6.904-284.0	Wet & Dry flat pleated filter made from PES fibre material with PTFE coating with a blue label. Suitable for vacuuming liquids, fine dust and coarse dirt from the M and L dust classes.	□
BENDS				
Plastic bend				
Elbow packaged NW40 1K	4	2.889-171.0	DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	■
Elbow electrically conducting packaged N	5	2.889-148.0	Antistatic, ergonomic bends with air-flow regulator in size DN 35 for dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	□
Plastic bend	6	5.031-718.0	DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
	7	5.031-939.0	Electrically conductive DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
	8	5.032-427.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend metal				
Bend, DN 35, metal	9	6.900-519.0	DN 35 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, stainless steel ID 35	10	6.903-141.0	Robust DN 35 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, DN 40, metal	11	6.900-276.0	DN 40 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The robust bend has a cone connection at both the hose end and the accessory end.	□
Bend, stainless steel ID 40	12	6.902-079.0	Robust DN 40 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool packaged NW40 360mm	13	2.889-153.0	Plastic Adv floor nozzle with width of 360 mm and nominal size of DN 40 for wet and dry vacuum cleaners from Kärcher. Features brush strips and squeegees that are easy to change.	■
Floor tool DN40-370	14	6.903-018.0	Aluminium floor nozzle with rollers, width of 370 mm and nominal size of DN 40 for wet and dry vacuum cleaners from Kärcher. Includes easy-to-replace brush strips and squeegees.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool neutrally DN40	15	6.906-383.0	Aluminium floor nozzle with rollers, width of 450 mm and nominal size of DN 40 for wet and dry vacuum cleaning. The brush strips and squeegees that are included are easy to change.	☐
Floor tool neutrally DN35	16	6.906-384.0	For wet and dry vacuum cleaners from Kärcher: aluminium floor nozzle (DN 35) with a width of 370 mm, including brush strips and squeegees that are easy to change.	☐
Wet and dry floor nozzle	17	2.889-117.0	For wet and dry vacuum cleaners from Kärcher: plastic Adv floor nozzle with width of 400 mm and nominal size of DN 40. Includes easy-to-replace brush strips and squeegees.	☐
Crevice nozzles				
Crevice nozzle DN 40 300mm 1:50	18	5.130-655.0	Plastic crevice nozzle in nominal width DN 40 for Kärcher wet and dry vacuum cleaners. Especially suitable for vacuuming out areas that are difficult to reach, such as joints, crevices and corners.	☒
Crevice nozzle packaged NW35	19	2.889-130.0	With the DN 35 plastic crevice nozzle, corners and crevices can be vacuumed quickly and thoroughly. Length: 210 mm.	☐
Crevice nozzle	20	6.900-922.0	The metal crevice nozzle (DN 35) enables vacuuming in crevices and corners. Length: 500 mm.	☐
Crevice nozzle DN40	21	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	☐
All-purpose brushes				
All-purpose brush	22	6.903-863.0	Natural bristles (ox hair), bristle element 120 x 45 mm.	☐
Car cleaning nozzles				
Car nozzle, ID 40, 90 mm	23	6.900-952.0	For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.	☐
	24	2.840-095.0	Flat angled, convenient, plastic, DN 40 car cleaning nozzle specially designed for new Kärcher wet and dry vacuum cleaners with a clip system at the suction hose. Working width: Approx. 90 mm.	☐
Rubber suction tools, nose 45°				
Rubber suction tools, nose 45°	25	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	☐
	26	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	☐
Pipe dusting nozzles				
BRUSH	27	6.903-035.0	Plastic, pipe diameter 100 mm	☐
	28	6.903-036.0	Plastic, pipe diameter 200 mm	☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION TUBES				
Suction tubes stainless steel				
Set suction tube stainless steel NW40 55	29	2.889-194.0	The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 40 and 550 mm long each). For Kärcher wet and dry vacuum cleaners.	■
Suction tube, DN 35	30	6.902-154.0	Suction tube made of high-quality stainless steel in DN 35 and 505 mm long for wet and dry vacuum cleaners from Kärcher.	□
Suction tube, ID 40	31	6.902-081.0	Suction tube made of high-quality stainless steel in nominal width DN 40 and 550 mm long for wet and dry vacuum cleaners from Kärcher.	□
Suction tube	32	6.906-531.0	The suction tube made of high-quality stainless steel (DN 40 and 1000 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	□
Suction tubes metal				
Suction tube DN35	33	6.900-514.0	The suction tube made of chrome-plated steel (DN 35, 505 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	□
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Suction hose	34	2.889-138.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	■
Electrically conductive suction hose	35	2.889-137.0	The electrically conductive suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	□
Suction hose	36	2.889-139.0	The suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	□
Suction hose, oil-resistant	37	2.889-140.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	□
Electrically conductive suction hose	38	2.889-141.0	The electrically conductive suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	□
	39	2.889-142.0	The electrically conductive suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	□
Extension hose packaged NW40 2.5m	40	2.889-146.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	□
Repair set NW40	41	2.889-150.0	Repair kit ID 40 for the new clip system.	□
Hose connection				
Adapter, DN 32/35, with internal thread	42	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION HOSES				
Hose connection				
Adapter, DN 40 with internal thread	43	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.	☐
Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)				
Repair set, C 40	44	2.639-873.0	Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	☐
Extension hose, C 40	45	6.906-344.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose	46	4.440-678.0	The suction hose with bend in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose (clip system), C 40, 10 m	47	6.906-279.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose	48	6.906-321.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
	49	6.906-714.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete (Clip-system), C ID 40, 4 m, el.	50	4.440-728.0	The electrically conductive suction hose with bend and PFC module in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose (Clip-system), C 40, 16 m	51	6.906-635.0	The suction hose in nominal width DN 40 and with 16 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose (clip system), C 40, 10 m, el.	52	6.906-877.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hoses with cone connection				
Suction hose, complete	53	4.440-263.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 40, 4 m, oil-resistant,	54	4.440-303.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, complete	55	4.440-463.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete	56	4.440-466.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐

☐ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION HOSES				
Suction hoses with cone connection				
Suction hose complete, ID 40, 10 m, oil-resistant	57	4.440-612.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, complete	58	4.440-264.0	The suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 61, smooth inside	59	4.440-328.0	The suction hose in nominal width DN 50 and with 3 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, complete, DN 61, 10 m	60	4.440-467.0	The suction hose in nominal width DN 50 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 61, 4 m, oil-resistant	61	4.440-613.0	The oil-resistant suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose complete, ID 61, 4 m, el.	62	4.440-616.0	The electrically conductive suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
FILTER BAGS				
Fleece filter bags (3 ply)				
Fleece filter bags, 5 Piece(s), NT 65, NT 70, NT 72, NT 75, NT 90	63	2.885-753.0	Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	☐
Paper filter bags				
Paper filter bags, 5 Piece(s), NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC	64	6.904-285.0	Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	☐
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
HEPA surface filter	65	6.904-364.0	For wet and dry vacuum cleaners: HEPA-14 (H14) flat pleated filter made of high-quality glass fibre material. Suitable for vacuuming hazardous dusts, coarse dirt and liquids.	☐
Special filter bags, wet filter bags				
Special filter bags, wet filter bags	66	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	☐
Membrane filter / fabric filter				
Candle Filter - Wood, NT 65/2, NT 75/2	67	2.414-003.0	Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums.	☐
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	68	6.904-282.0	Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	☐
CONNECTING SLEEVES				
Y-adapter kit				
Y-adapter kit	69	2.637-217.0	Plastic distributor - suitable for NT vacuum cleaners.	☐
Connecting sleeve C-DN (clip on taper), EL (electroconductive)				
Connection cone NW35	70	5.407-005.0	Adapter clip system DN 35 for connecting suction tubes and small nozzles to cone DN 35. Perfect for vehicle interior cleaning, even without the connection of other nozzles.	☐

☐ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
CONNECTING SLEEVES				
Connecting sleeve C-DN (clip on taper), EL (electroconductive)				
Connection cone NW40	71	5.407-006.0	For connecting small nozzles and suction tubes with cone DN 40: Adapter clip system DN 40. Ideal for vehicle interior cleaning tasks, with no need to connect additional nozzles.	☐
C-ID 35 adapter	72	5.407-112.0	C 35 hose connector for DN 35 accessory, electrically conductive.	☐
C 40 adapter	73	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	☐
C-DN 40 adapter	74	5.407-111.0	C 40 hose connector for DN 40 accessory, electrically conductive.	☐
Adapter for electric power tools, clip on, el.				
Sleeve for tool C35EL	75	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	☐
Adapter for electric power tools, C 35, el.	76	5.453-048.0	Inside Ø 25.4 mm, outside Ø 34.6 mm/ 38 mm, electrically conductive. Only NT vacuums.	☐
	77	5.453-050.0	Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive. Only NT vacuums.	☐
Adapter for electric power tools, screwable				
Power tool adapter, threaded, DN 35	78	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	☐
Adapter for electric power tools, screwable, ID 35	79	5.453-026.0	Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm.	☐
Power tool adapter, threaded, DN 35	80	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	☐
	81	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	☐
Reducing sleeves				
Reducer	82	5.407-108.0	Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.	☐
	83	6.902-017.0	Reducer, enabling accessories (upholstery nozzle, crevice nozzle, etc.) with a DN 35 connection adapter to be connected to accessory parts (bend or suction tube) that have a DN 40 connection adapter.	☐
Sleeve C40 / C35	84	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.	☐


☐ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



85



86



87



88



89



90



91



92

		Order no.	Description	
CONNECTING SLEEVES				
Reducing sleeves				
Reducer from ID 35 to 32	85	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	☐
Set reducing / extension sleeves				
Set reducing / extension sleeves	86	2.860-117.0	DN 40/35, DN 35/32 (tube -> nozzle), plastic.	☐
TARGET GROUP SPECIFIC VACUUM CLEANER ACCESSORY SETS				
Professional cleaning kit ID 40	87	2.637-353.0	Single parts: 4 m suction hose (4.440-263.0), metal bend (6.900-276.0), 2x 0.5 m metal suction tubes (6.900-275.0), crevice nozzle (6.903-033.0), floor nozzle with rollers (6.903-051.0).	☐
Car cleaning kit	88	2.862-166.0	Vehicle interior cleaning accessory kit in nominal width DN 35 for Kärcher wet and dry vacuum cleaners. The kit comprises various nozzles and adapter pieces in nominal widths DN 35 and DN 40.	☐
Chip cleaning kit	89	2.640-760.0	Target group-specific robust connection set in DN 61 for cleaning work in combination with oil-resistant suction hose and rubber nozzle.	☐
OTHER ACCESSORIES FOR T AND NT				
CS 40 Me	90	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.	☐
Adapter connection old elektr. leitend	91	5.031-436.0	Electroconductive adapter for connecting NT hoses with bayonet 1.0 connection of nominal widths DN 35, 40, 50 to the new accessory system for wet and dry vacuum cleaners from Kärcher.	☐
UBS NON-CONDUCTIVE MEDIA				
Add-on kit nonconducting media NT Tact²	92	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	☐

☐ Available accessories.