

B 260 R I BP PACK+R100+DOSE+SB

With a powerful battery, high-performance battery charger, 100 cm working width and roller brush head: the ride-on scrubber drier B 260 RI Bp Pack for tough industrial applications.



Made in Europe



SIDE BROOM



DOSE



WHEEL ANGLE SENSOR

Order no.

1.480-252.0

- 260 l tanks for fresh/dirty water, 100 cm roller brush head, ride-on, 10 km/h
- Off-board charger, 630 Ah lead-acid battery, 5 h run time, max. 10,000 m²/h
- Side brush, working light, automatic detergent dosing unit

Technical data

EAN code		4054278953809
Drive type		Battery
Traction drive		traction motor
Working width, brushes	cm	100
Working width with 1 side brush	mm	1220
Working width with 2 side brushes	mm	1220
Working width, vacuuming	cm	114
Fresh/dirty water tank		260 / 260
Waste container	l	26
Theoretical area performance	m ² /h	max. 10000
Practical area performance	m ²	7000
Battery type		low maintenance
Battery	V / Ah	36 / 630
Battery run time	h	max. 5
Battery charging time	h	approx. 12
Driving speed	km/h	max. 10
Climbing ability	%	max. 15
Brush speed	rpm	1250
Brush contact pressure	kg / g/cm ²	150 / 210
aisle turning width	cm	212
Water consumption	l/min	max. 9
Sound pressure level	dB(A)	73
Permissible total weight	kg	1840

Scope of supply

- Roller brush: 2 Piece(s)
- Battery and charger included
- Squeegee, curved
- Side brush
- dosing canister for detergent with closed loop system

Equipment

- Auto Fill
- Patented tank rinsing system
- Powerful traction drive
- Automatic water stop
- DOSE
- Parking brake
- Integrated sweeping mechanism
- Adjustable steering wheel
- Sweeping function
- Solenoid valve
- Two-tank system
- standard daytime driving light
- Type of suction lips: Linatex®
- Kärcher colour and operating concept
- Kärcher Intelligent Key System (KIK) with over 30 user languages and individual user rights

Weight without accessories	kg	1430
Dimensions (L × W × H)	mm	2000 × 1180 × 1570


Home Base fastening possibilities for mop or similar
 speed reduction in curves for increased safety
 electrical and mechanical float switch
 Easy Operation selector switch

This machine requires instruction.



Newly developed roller brush head

- Greatly improved sweeping results and prevents squeegee blockages.
- The rollers can be changed in a matter of seconds and without tools.
- Excellent cleaning results.

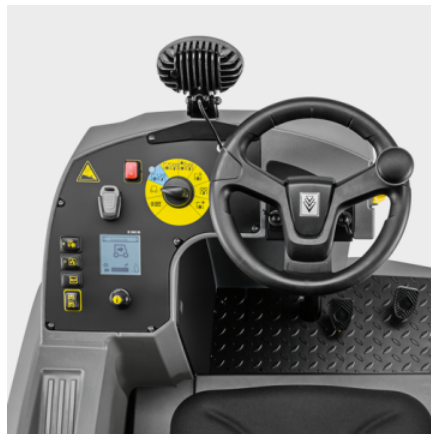

10 km/h driving speed

- Enables a high area performance in next to no time and quick transportation operations.
- The steering angle sensor acts as a safety feature when driving in curves.
- There is automatic braking if speed is too high when driving in curves.



Includes two turbines as standard

- Excellent vacuuming results on all surfaces.
- Wear-free Ec turbines.
- Optimised airflow with the newly developed squeegee.

**SUSTAINABILITY INFORMATION FROM B 260 R I BP PACK+R100+DOSE+SB
1.480-252.0**



Sustainability features

Standby Mode

DOSE (detergent dosage system)

eco!Mode (Energy and Water Saving Mode)

EQUIPMENT FOR B 260 R I BP PACK+R100+DOSE+SB


1.480-252.0



	Order no.	Description	
ROLLER BRUSHES FOR BR			
Roller brush red for replacement R100, medium, red, 914 mm	1	4.250-180.0	Red standard roller brush for maintenance cleaning. ■
Roller brush black - R 100 Industrial, very hard, black, 914 mm	2	5.250-408.0	Very abrasive roller brush for the deep cleaning of hard-wearing floor coverings with very sticky dirt. □
BRUSH HEADS			
Brush-head R 100/ 39"	3	2.763-056.0	Ideal for stubborn dirt: The brush head with 2 roller brushes, 100 cm working width, integrated pre-sweeping function and tool-free brush replacement. ■
WIPING LIPS			
Set side strip	4	4.250-167.0	Set of tear-resistant squeegee blades made of Linard. They keep the cleaning water in the working area of the brush head and ensure optimum squeegee performance in turning manoeuvres. ■
Set side strip oil resistant	5	4.250-166.0	Set of low-wear, oil-resistant squeegee blades made from polyurethane. For optimum cleaning results with curve movements and reliable keeping of the cleaning water in the working area of the brush head. □
SUCTION BARS AND SQUEEGEES			
Suction bar, complete			
Suction bar parabolic B250R Industrial, 1140 mm, parabolic	6	4.777-104.0	Parabolic, robust squeegee made from aluminium with 1140 mm suction width and quick coupling. Delivers excellent suction and drying results. Tool-free change of suction lips. ■
Squeegees for suction bars			
Suction lip set standard B260RI, Linatex®, 1260 mm	7	4.250-137.0	Tear-resistant suction lip made from Linatex® with special inlet openings for optimal suction results at crevices and joints. Suitable for parabolic squeegee with 1140 mm suction width. ■
Suction lip set PU 1140mm/45in, oil-resistant, slotted, 1260 mm	8	4.250-143.0	Low-wear, oil-resistant suction lip made from polyurethane. Three-layer material for high level of flexibility and optimum cleaning properties. For parabolic squeegee with 1140 mm suction width. □
KITS			
Side broom/SSD mounting kit			
Add-on kit side broom B 260RI R100	9	2.644-371.0	Side brush, right and left. Includes lifting motor and deflector. Removes loose dirt around edges. ■
Dose mounting kit			
Add-on kit metering cleaning agents B260	10	2.644-368.0	Attachment kit for Kärcher scrubber dryers for the detergent dosing unit between 0.5 and 3% directly from up to 2x 10-l canisters. With filling level indicator on the device display. ■
Other attachment kits			
Add-on kit spraying nozzle B 250	11	2.644-392.0	Attachment kit for retrofitting the B 260 R ride-on scrubber dryer with side brushes. The spray nozzles are dust-binding and thereby reduce the amount of dust stirred up when using the side brushes. □
Add-on kit ram protection suction bar	12	2.644-369.0	Impact protection for our B 260 RI ride-on scrubber drier. Prevents damage to the squeegee when reversing and prevents collisions with tall obstacles, such as palettes. □
Add-on kit connection HD	13	2.644-370.0	Attachment kit for the B 260 RI ride-on scrubber dryer to attach the HD 4/11 C Bp Pack high-pressure cleaner or the NT 22/1 Ap Bp Pack wet and dry vacuum cleaner. □
Protective roof	14	2.643-849.0	This high-quality protective roof for the B 250 R scrubber drier (height 2,170 mm including protective roof) protects the operator from falling objects - tested in accordance with EN IEC 60335-2-72. □

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR B 260 R I BP PACK+R100+DOSE+SB 1.480-252.0



		Order no.	Description	
KITS				
Lighting/RKL mounting kit				
Add-on kit revolving signal light B 260	15	2.644-363.0	Flashing beacon attachment kit for Kärcher scrubber dryers. Improves visibility during cleaning applications and thus increases safety in the working environment.	<input type="checkbox"/>
Add-on kit BlueSpot front B260RI	16	2.644-366.0	Blue spotlight attachment kit for B 260 RI ride-on scrubber dryer. Projects a blue spot onto the floor in front of the machine for enhanced safety, e.g. in high-bay warehouses.	<input type="checkbox"/>
Add-on kit BlueSpot rear B260RI	17	2.644-367.0	Blue spotlight attachment kit for B 260 RI ride-on scrubber dryer. Projects a blue spot onto the floor behind the machine for enhanced safety, e.g. in high-bay warehouses.	<input type="checkbox"/>
SIDE BRUSHES				
Standard side brushes				
Standard side brush	18	6.905-986.0	Standard side brush with moisture-proof universal bristles for normal soiling on all surfaces. Extremely durable.	<input checked="" type="checkbox"/>
TRACTION BATTERIES AND CHARGERS				
Batteries				
Battery kit with loader 525Ah/36V Li-Ion	19	2.654-000.0	525 Ah lithium iron phosphate battery with a long manufacturer's guarantee: fast and intermediate charging capability and service life around four times longer than lead batteries. Ideal for continuous operation with fast chargers.	<input type="checkbox"/>
Battery Chargers				
BC cpl. offp 38,4/200A 380V/50-60Hz	20	4.654-083.0	200 A/36 V off-board quick charger for the 525 Ah lithium-ion trough battery of the B 260 RI. Can be used with CEE 32 A plug at 330-480 V/50-60 Hz.	<input type="checkbox"/>

■ Included in delivery. Available accessories.